

### Features

- Spray performance delivers a drenching "rain" experience.
- Angled nozzles provide a full coverage spray.
- Adjustable swivel ball joint allows for precise spray adjustment.
- MasterClean™ sprayface resists hard water buildup and is easy to clean.
- Complements the Awaken® line.
- 2.0 gpm (7.6 lpm) flow rate.

### Material

- KOHLER finishes resist corrosion and tarnishing.

### Installation

- Installs as a ceiling or wall mount application.
- 1/2" NPT connection.
- Shower arm and flange sold separately.



### Codes/Standards

ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)

### KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

|  |    |                         |
|--|----|-------------------------|
|  | CP | Polished Chrome         |
|  | BN | Vibrant® Brushed Nickel |

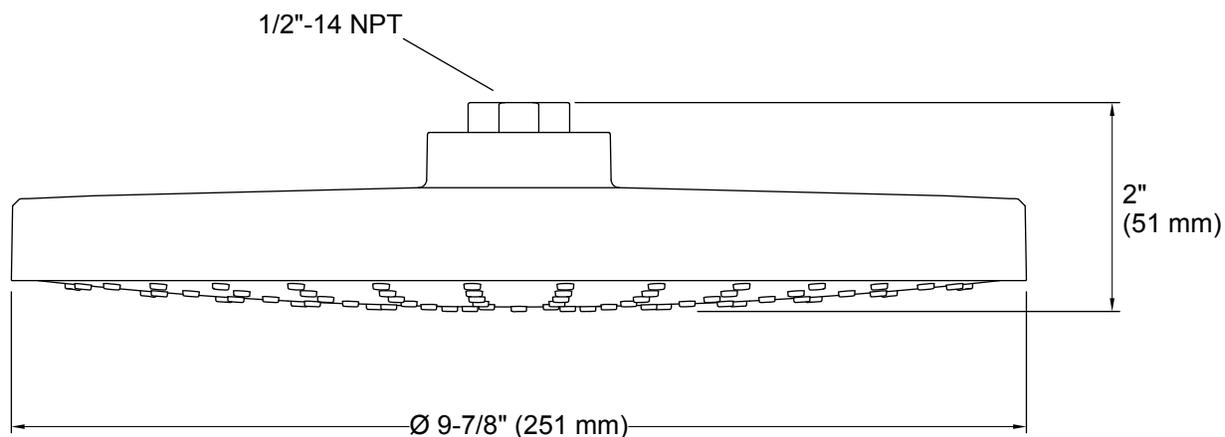

**Technical Information**

All product dimensions are nominal.

**Showerhead/Body Spray:**

Rated maximum flow: 2 gal/min (7.6 l/min)

Pressure: 45 psi (3.1 bar)

**Notes**

Install this product according to the installation instructions.