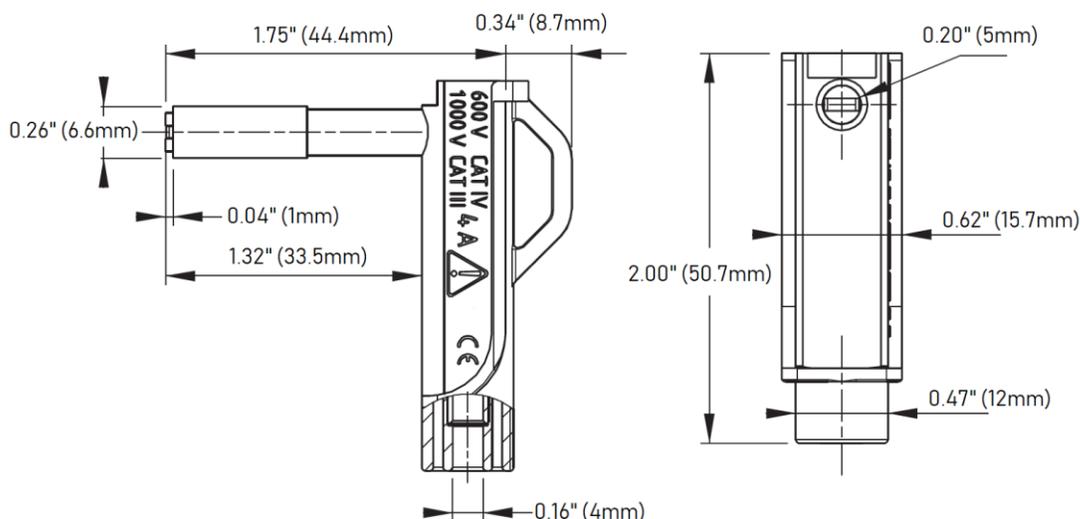


**Model 73106**  
**Right-Angle Magnetic Probe with 4mm Safety Jack****Features**

- Ideal for temporary connections to terminal blocks with metal screws
- Quick connect and disconnect with magnetic probe head
- Insulated 4mm safety banana jack for attachment to sheathed test leads
- Magnetic probe head diameter of 6.6mm (0.260")
- Compatible with popular Pomona test lead models 5907A, 5908A, and 5909A test lead sets

**Materials**

Conductor: Nickel-plated Brass and Magnetic Material  
Insulation: Polypropylene

**Ratings**

Voltage: CAT II 1000V / CAT III 1000V / CAT IV 600V  
Current: 4 amperes  
Operating Temperature: +5°C to +40°C (+41°F to 104°F)

**Ordering Information**

Model: 73106-*color*

*Color*: 0=Black, 2=Red, 6=Blue

Right-Angle Magnetic Probe with 4mm Safety Jack



**USA:** Sales: 800-490-2361  
Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
Fax: 425-446-5844  
**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500  
**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.