1319

ADRIATIC

MANSFIELD®

Elongated Front, ADA*, SmartHeight Flush Valve Toilet, 1.1 to 1.6 gpf water consumption

FEATURES

- Designed for commercial and industrial applications
- Water consumption ranges from 1.1 to 1.6 gallons per flush, depending on the flush valve used
- High performance, high efficiency (HET) when using the proper flushometer
- Elongated front, SmartHeight bowl
- · ADA compliant
- 1-1/2" top spud provided to accommodate many brands of flush valves
- 10" rough-in
- · 1-7/8" glazed trapway
- · The Mansfield® limited lifetime warranty
- · Available in White

*This product is designed to meet ADA requirements When properly installed in **COMPONENTS** accordance with ADA guidelines



CUMPUNEN

MODEL #	DESCRIPTION	CODES/STANDARDS
1319 (131900002)	Elongated front, ADA*, SmartHeight, toilet bowl. Includes a 1-1/2" top spud. Toilet seat, flush valve and supply not included.	HIGH EFFICIENCY C & ADA COMPLIANT

MANSFIELD®

ADRIATIC**

Elongated Front, ADA*, SmartHeight Flush Valve Toilet, 1.1 to 1.6 gpf water consumption

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
1319	Elongated front, SmartHeight, floor mount, flush valve toilet, 1.1 to 1.6 gallons per flush	HIGH EFFICIENCY C ADA COMPLIANT

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	Siphon jet technology
WATER USAGE	1.28 to 1.1 gallons per flush
WATER SURFACE AREA	8' X 10'
ROUGH-IN	10'
MAP RATING	1,000 grams

TRAP DIAMETER	1-7/8'
TRAP SEAL	2-1/4'
SHIPPING WEIGHT	Model 1319 - 51 lbs. (23 kg)
WARRANTY	Vitreous China - Limited Lifetime

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

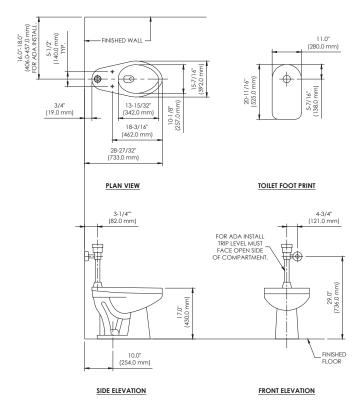

^{*} TOILET SEAT NOT INCLUDED, DIMENSIONS HERE REPRESENT AN STANDARD TOILET SEAT.

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.