

4115-106 BARRETT™

MANSFIELD®

Elongated Front, ADA*, SmartHeight, Vitreous China, Two-Piece Toilet

FEATURES

- Concealed trapway for easier cleaning
- 1.6 gpf / 6.0 lpf low water consumption
- Elongated front, SmartHeight bowl
- Complies with ADA requirements for accessibility
- High performance MagnaFlush™ flushing technology
- 3" flush valve
- Pilot operated anti-siphon fill valve
- 12" rough-in
- Model 69 side-mount metal trip lever
- 2-1/8" glazed trapway
- The Mansfield® limited lifetime warranty
- Available in White

*Meets ADA height requirement when installed with a regular toilet seat





MODEL 4115-106

Toilet seat not included



COMPONENTS



MODEL #	DESCRIPTION	CODES/STANDARDS
4115-106 (411510000 - 106010000)	Elongated front, ADA*,SmartHeight, two-piece toilet.	 
4115 (411510000)	Elongated front, ADA*, SmartHeight toilet bowl only. Toilet seat not included.	
106 (106010000)	Tank and cover only, with left hand, side-mount, chrome-plated, metal trip lever. Supply not included.	
TANK TRIM & REPLACEMENT PARTS		
69	Trip lever - side-mount, chrome-plated, metal trip lever, left hand	
2206	Pilot operated fill valve	
630-0207	Replacement flapper	
106-LID	Tank lid	

4115-106 BARRETT™

MANSFIELD®

Elongated Front, ADA*, SmartHeight, Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
4115-106	Elongated front, SmartHeight (1.6gpf/6.0 lpf) two-piece toilet	 

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3' MagnaFlush™ flushing technology
WATER USAGE	1.6 gpf / 6.0 lpf
WATER SURFACE AREA	8-1/4' X 10-3/8'
ROUGH-IN	12"
MAP RATING	800 grams

TRAP DIAMETER	2-1/8"
TRAP SEAL	2-1/4"
SHIPPING WEIGHT	Model 4115- 69 lbs. (31 kg) Model 106- 40 lbs. (18 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

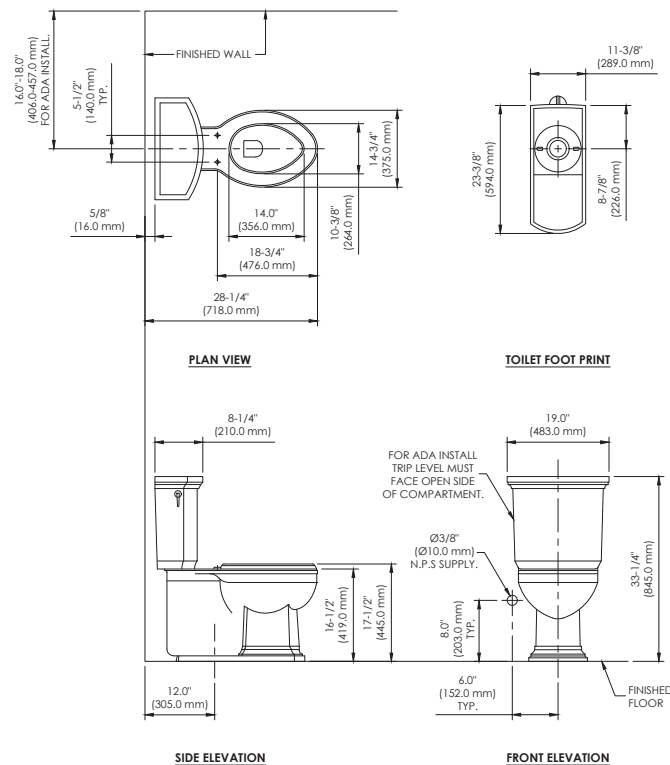

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.