380-387 **SUMMIT**® 1.28

MANSFIELD®

Round Front, Vitreous China, Two-Piece Toilet

FEATURES

- High performance MagnaFlush™ flushing technology
- SmartFasten™ 3-bolt tank-to-bowl connection
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- · Round front bowl
- Fluidmaster® pilot operated anti-siphon fill valve
- 3' Rigid Flapper flush valve requires less force to flush, is more consistent and uses a simple universal repair part/seal
- · Model 57 chrome-plated, metal trip lever
- 12' rough-in
- · 2' glazed trapway
- The Mansfield® limited lifetime warranty on china;
 Five-year limited warranty on tank trim
- · Available in White, Biscuit and Bone



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
380-387	Round front, two-piece toilet. Less toilet seat and supply. Specify color.	\$01.56 ₀		
380	Round front toilet bowl only. Less toilet seat. Specify color.			
387	Tank and cover only, with left hand, front-mount, chrome-plated, metal trip lever. Less supply. Specify color.	HIGH EFFICIENCY POPULATION TOULET		
TANK TRIM & REPLACEMENT PARTS				
57	Trip lever - chrome-plated, metal trip lever, left hand			
2036-1212	Summit® 1.28 rigid flapper flush valve			
400A	Fluidmaster® anti-siphon pilot fill valve			
2206	Anti-siphon pilot fill valve (compatible replacement)			
630-0030	Replacement flush valve seal			
386-LID	Tank lid			

380-387 **SUMMIT**® 1.28

MANSFIELD®

Round Front, Vitreous China, Two-Piece Toilet

SPECIFICATIONS

MODEL #	DESCRIPTION	CODES/STANDARDS
380-387	Round front, (1.28 gpf/4.8 lpf) two-piece toilet	HIGH EFFICIENCY HIGH EFFICIENCY TOULET


MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	MagnaFlush™ flushing technology
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	8' X 9'
ROUGH-IN	12'
MAP RATING	1,000 grams

TRAP DIAMETER	2'
TRAP SEAL	2-3/8'
SHIPPING WEIGHT	Model 380 - 49 lbs. (22.2 kg) Model 387 - 36 lbs. (16.3 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited Five Year

TANK OPTIONS 387RH Variation of model 387, with right hand trip lever. 387LT Variation of model 387, with tank liner.

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

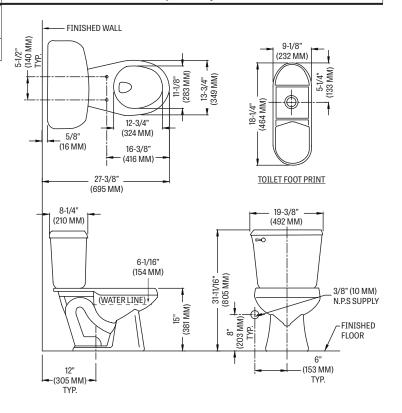

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.