



# 5062/5562 Covington™ C 60" x 60" x 23" Swirl-way® Whirlpool and Bathtub

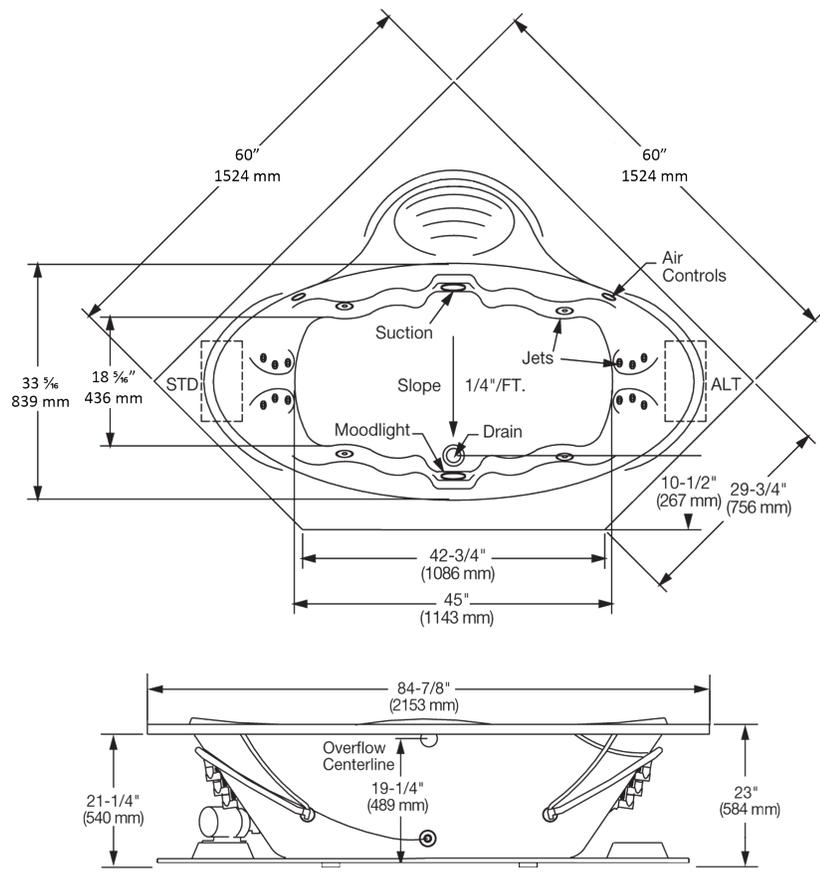

- NOTES:**
1. Pump locations are shown for clarity.
  2. Required pump motor access is 20" W x 15" H.
  3. Measurements may vary 1/4" (+/-)
  4. Nailing flanges and removable aprons are not available for this unit.
  5. These dimensions are nominal and subject to change without notice.

## SPECIFICATIONS

Specification	Description	Specification	Description
Material	Acrylic, fiberglass reinforced	Warranty	Limited Ten Year
Construction	Self-contained, pre-plumbed whirlpool bath system mounted on a pre-leveled base	Water Capacity	70 gal. (min) 55 gal. (max)
Number of Jets	14	Shipping Weight	Whirlpool - 175 lbs Bathtub - 140 lbs
Floor Loading Weight	47 lbs. / sq.ft.		
ESSENTIALS PACKAGE		COMFORT PACKAGE	
Pump Motor	Single speed induction pump, 9 AMP	Pump Motor	Variable speed induction pump, 9 AMP
On/Off Control	One button on/off electronic keypad	On/Off Control	Multi-function electronic keypad
Electrical Requirements	One 120V, 20 amp GFCI dedicated circuit. Optional heater: separate 120 V, 20 amp dedicated circuit.	Electrical Requirements	Two separate 120 V, 20 amp dedicated circuits

