ITEM NO. 3803792 / MODEL NO. 5374550000 BRENTWOOD® 3672

# 

72" x 36" x 22-1/2", Acrylic, Swirl-Way® Air Massage Bath

## FEATURES

- · High gloss, easy-to-clean acrylic with fiberglass reinforcement
- Air massage hydromassage system uses discreet air injectors to create huge air bubbles that revitalize the body with a gentle massage, leaving bathers deeply relaxed
- Clean, geometric lines
- · Includes one pillow
- Rectangular model with end drain (left- or right-hand installation)
- · Pre-leveled legs for easy installation
- Integrated dual armrests for bather's comfort
- Two decorative handles
- · Spacious bathing well designed for one-person comfort
- · 10-year limited warranty on acrylic
- · Installation: Drop-In, Alcove or Undermount
- · Available in White



#### COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS	
5374550000	72' x 36' x 22-1/2' Rectangular Swirl-Way® Air Massage Bath. Drain not included.	UPC ® USPC US	
ACCESSORIES			
CAB-	Cable Overflow Drain (White — 1330, Chrome — 1335, Everbrass — 1336, Brushed Nickel — 1337, Oil Rubbed Bronze — 1338, Matte Black — 1339)		
TIP-	Tip Toe Overflow Drain (Chrome — 1335, Everbrass — 1336, Brushed Nickel — 1337, Oil Rubbed Bronze — 1338, Matte Black — 1339)		
SWAPOO	Nailing Flange Kit (includes 14' PVC nailing flange, tacky tape and installation instructions)		



ITEM NO. 3803792 / MODEL NO. 5374550000 BRENTWOOD<sup>®</sup> 3672

# 



72" x 36" x 22-1/2", Acrylic, Swirl-Way® Air Massage Bath


#### **SPECIFICATIONS**

MATERIAL	Acrylic, fiberglass reinforced
CONSTRUCTION	Self contained, pre-plumbed air bath system mounted on pre-leveled base.
ELECTRICAL REQUIREMENTS	One 120 volt, 20 amp GFCI protected circuit.

SOAKING DEPTH	16-1/4'
NUMBER OF JETS	34
WATER CAPACITY	65 gal. (min.) / 80 gal. (max)
FLOOR LOADING WEIGHT	47 lbs. sq.ft.
SHIPPING WEIGHT	Model 5374550000 - 170 lbs. (77 kg)
BLOWER MOTOR	120 volt, 9 amp
WARRANTY	Acrylic - 10-Year

### **TECHNICAL INFORMATION**

Note: these dimensions are nominal and subject to change without notice.

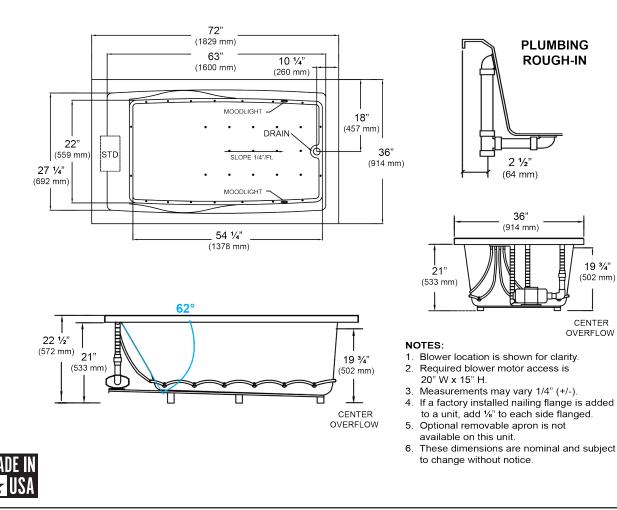

19 3⁄4"

(502 mm)

CENTER OVERFLOW