

GP6500E

GP6500E SERIES Portable Generator

Features

- **PowerRush™ Advanced Technology** delivers up to 40% more starting capacity allowing you to do more with less.*
- **Electric Start** for easy operation (battery included).
- **Generac's OHV engine** with splash lubrication provides a long engine life.
- **Low-oil level shutdown** automatically safeguards engine from damage.
- **Large-capacity steel fuel tank** with incorporated fuel gauge provides durability and up to a 10.5 hour run-time at 50% load.
- **1 ¼" steel-tube cradle** for added durability and strength.
- **Hour Meter** tracks maintenance intervals.
- **Heavy-duty, never-flat wheels** allow for easy portability.
- **Fold-down handle** for sturdy portability and compact storage.

*Increases electrical current upon demand; above rated output when starting electric motors


Model 7682-0 UPC: 696471075151
(49-State)

Model 7682-2 UPC: 696471075731
(49-State/CSA)



AC Rated Output Running Watts 6500
AC Maximum Output Starting Watts 8125

Control Panel

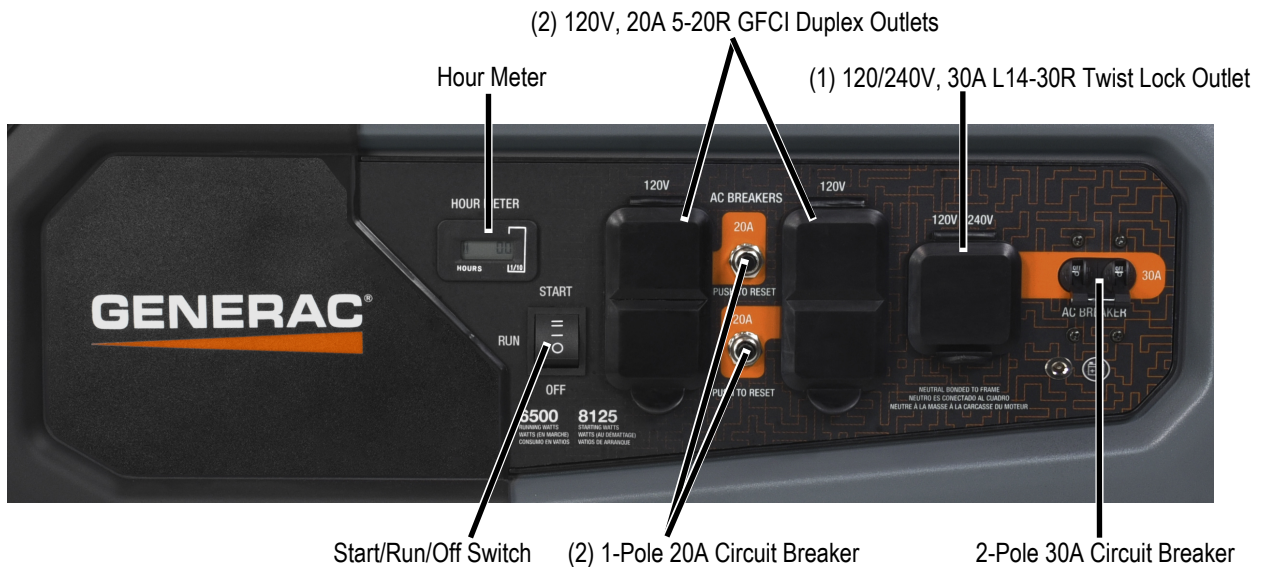

GP6500E

Specifications

| | |
|------------------------------------|------------------------------------|
| Product Series | GP6500E |
| Model Number | 7682-0 / 7682-2 |
| Configuration | 49 ST / 49 ST/CSA |
| AC Rated Output Running Watts | 6500 |
| AC Maximum Output Starting Watts | 8125 |
| Rated AC Voltage | 120/240 VAC |
| Rated AC Frequency | 60 Hz |
| Rated 120/240 VAC Amperage | 54.2 / 27.1 |
| Engine Displacement | 389cc |
| Engine Type | OHV |
| Engine RPM | 3600 |
| Recommended Oil | 10W-30 / SAE 30 |
| Oil Capacity qt (L) | 1.06 (1.0) |
| Lubrication Method | Splash |
| Automatic Voltage Regulation (AVR) | Yes |
| Choke Location | On Engine |
| Fuel Shut Off | On Fuel Tank |
| Starting Method | Recoil Pull Start / Electric Start |
| Battery Included | Yes |

| | |
|---------------------------------------|---|
| Battery Type | Lead Acid (12V DC, 9Ah) |
| Battery Part No. | 0G9449 |
| Battery Dimensions | 5.94" x 2.56" x 3.70" |
| Battery Wall Charger Adapter | Included |
| Low Oil Shutdown | Yes |
| Neutral Bonded to Ground | Yes |
| Start Switch Type | Start / Run / Off |
| Start Switch Location | On Control Panel |
| Fuel Gauge | Yes |
| Fuel Tank Capacity gal (L) | 6.9 (26) |
| Run Time at 50% of Rated Load (Hours) | 10.5 |
| Handle Style | Dual Grip, Single Folding with Lock Pin |
| Wheel Type | 9.5" Never Flat |
| Warranty- Residential | 3 Year Limited |
| Warranty- Commercial | 1 Year Limited |
| Included | battery, engine oil, oil funnel, handle & wheel kit, owner's manual |

Dimensions and Weights

| | |
|--------------------------|-------------|
| Length in (mm) | 27.2 (692) |
| Width in (mm) | 27 (684) |
| Ext. Length in (mm) | 45.3 (1151) |
| Height in (mm) | 26.5 (674) |
| Carton Length in (mm) | 28.3 (720) |
| Carton Width in (mm) | 21.7 (550) |
| Carton Height in (mm) | 28 (710) |
| Unit Weight lbs (kg) | 182 (82.5) |
| Shipping Weight lbs (kg) | 200 (90.7) |

