ITEM NO. 3781166 / MODEL NO. 5352550000

# 

60" x 32" x 21-1/4", Acrylic, Swirl-Way® Air Massage Bath

### FEATURES

- · High gloss, easy-to-clean acrylic with fiberglass reinforcement
- Air massage hydromassage system uses discreet air injectors to create huge air bubbles that revitalize the body with a gentle massage, leaving bathers deeply relaxed
- · Rectangular model with end drain (left- or right-hand installation)
- Pre-leveled legs for easy installation
- · Spacious bathing well designed for one-person comfort
- 10-year limited warranty on acrylic
- Installation: Drop-In or Alcove
- · Available in White



#### **COMPONENTS**

MODEL #	DESCRIPTION	CODES/STANDARDS	
5352550000	60' x 32' x 21-1/4' Rectangular Swirl-Way® Air Massage Bath. Drain not included.	UPC ® USPC US	
ACCESSORIES			
LDK-	Linear DK Overflow Drain (White — 1330, Chrome — 1335, Everbrass — 1336, Brushed Nickel — 1337, Oil Rubbed Bronze — 1338, Matte Black — 1339)		



# 



60" x 32" x 21-1/4", Acrylic, Swirl-Way® Air Massage Bath


#### **SPECIFICATIONS**


MATERIAL	Acrylic, fiberglass reinforced
CONSTRUCTION	Self contained, pre-plumbed air bath system mounted on pre-leveled base.
ELECTRICAL REQUIREMENTS	One 120 volt, 20 amp GFCI protected circuit.


SOAKING DEPTH	14-3/4'
NUMBER OF JETS	32
WATER CAPACITY	42 gal. (min.) / 54 gal. (max)
FLOOR LOADING WEIGHT	47 lbs. sq.ft.
SHIPPING WEIGHT	Model 5352550000 - 150 lbs. (68 kg)
BLOWER MOTOR	120 volt, 9 amp
WARRANTY	Acrylic - 10-Year

### **TECHNICAL INFORMATION**

Note: these dimensions are nominal and subject to change without notice.

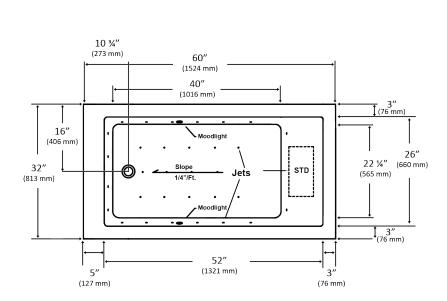

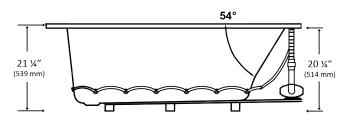



PLUMBING

#### NOTES:

1) Standard blower location shown for clarity.

- 2) Required blower motor access is 20" W x 15" High 3) Measurements may vary 1/4" (+/-)
- 4) If a factory installed nailing flange is added to a
- unit add 1/8" to each side flanged. 5) Removable apron is not available for this unit.
- 6) These dimensions are nominal and subject to

change without notice.