

# PM9400E

Portable Generator

Model P0080100 UPC: 696471077704  
(49 ST)


## Features

- **COsense® Technology** STOPS, ALERTS, SAVES. Powerful protection from hazardous carbon monoxide.
- **One-Touch Electric Start** with auto-choke provides reliable, hassle-free startups.
- **Large Capacity Steel Fuel Tank** provides durability and up to a 12 hour run-time at 25% load.
- **Powermate OHV Engine** provides consistent power for multiple applications.
- **10" Never Flat Wheels** for easy transportation.
- **Hour Meter** tracks run-time and maintenance intervals.
- **Low-Oil Level Shutdown** prevents engine damage.
- **Fuel Gauge** allows users to keep track of gasoline levels.
- **Covered Outlets** provide protection and keep out debris.



**AC Maximum Output Starting Watts 9400**  
**AC Rated Output Running Watts 7500**

## 49-State Control Panel

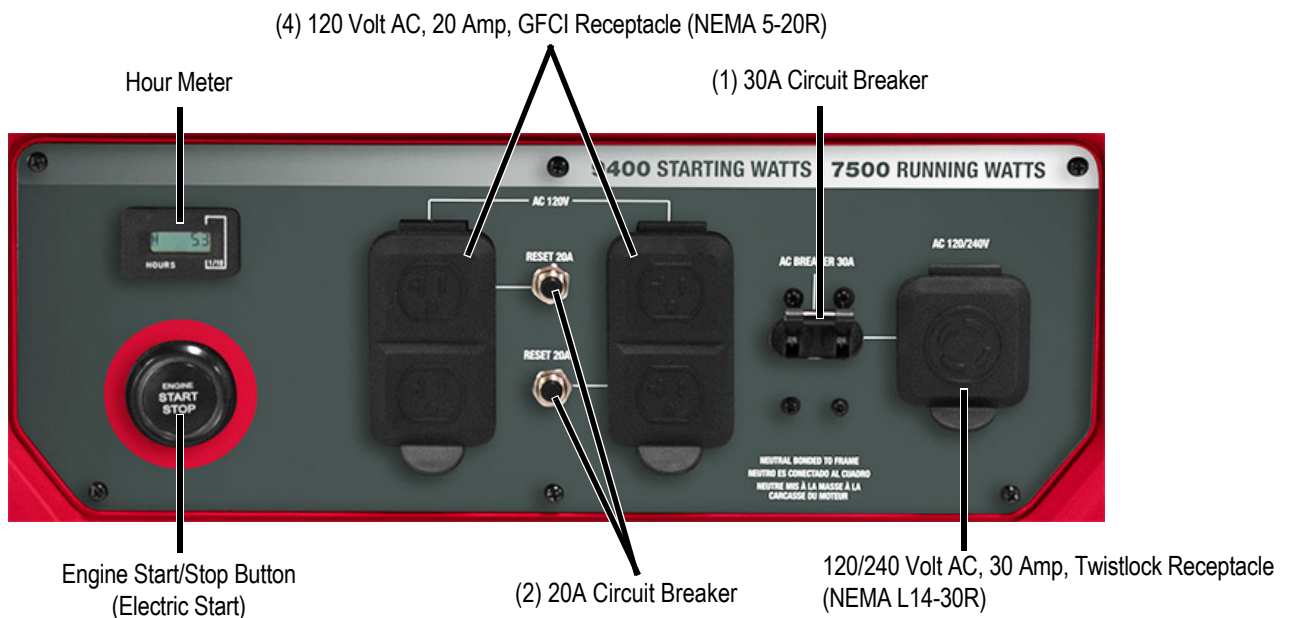

## PM9400E

### Specifications

|                                  |   |
|----------------------------------|---|
| Product Series                   | PM9400E   |
| Model (Configuration)            | P0080100 (49 ST)  |
| AC Maximum Output Starting Watts | 9400  |
| AC Rated Output Running Watts    | 7500  |
| Rated AC Voltage                 | 120/240 VAC   |
| Rated AC Frequency               | 60 Hz   |
| Rated 120/240 VAC Amperage       | 62.5 / 31.3   |
| Engine Displacement              | 420cc   |
| Engine Type                      | OHV   |
| Engine RPM                       | 3600  |
| Recommended Oil                  | 10W-30  |
| Lubrication Method               | Splash  |
| Choke Location                   | Auto-Choke (manual lever on engine for recoil start mode) |
| Fuel Shut Off                    | On Fuel Tank  |
| Starting Method                  | One-Touch Electric Start / Recoil                         |
| Low Oil Shutdown                 | Low Level   |
| Neutral Bonded to Ground         | Yes   |
| Start Switch Type                | Push Button   |

|                                       |                  |
|---------------------------------------|------------------|
| Start Switch Location                 | On Control Panel |
| Fuel Tank Capacity Gal (L)            | 8 (30.3)         |
| Run Time at 25% of Rated Load (Hours) | 12               |
| Run Time at 50% of Rated Load (Hours) | 10               |
| Warranty- Residential                 | 3 Year Ltd       |
| Warranty- Commercial                  | 90 Day           |

### Dimensions and Weights

|                          |             |
|--------------------------|-------------|
| Extended Length in (mm)  | 48.7 (1238) |
| Length in (mm)           | 31 (789)    |
| Width in (mm)            | 27 (685)    |
| Height in (mm)           | 26.4 (670)  |
| Carton Length in (mm)    | 32.7 (830)  |
| Carton Width in (mm)     | 23 (585)    |
| Carton Height in (mm)    | 24.2 (615)  |
| Unit Weight lbs (kg)     | 188 (85.3)  |
| Shipping Weight lbs (kg) | 204 (92.5)  |

