382CTK SUMMIT®

MANSFIELD®

Complete Toilet Kit, Elongated Front, Vitreous China, Two-Piece Toilet

FEATURES

- · Complete toilet kit (CTK)
- High performance MagnaFlush™ flushing technology
- SmartFasten™ 3-bolt tank-to-bowl connection
- 1.6 gpf / 6.0 lpf low water consumption
- · Elongated front bowl
- · Fluidmaster® pilot operated anti-siphon fill valve
- 3' Rigid Flapper flush valve requires less force to flush, is more consistent and uses a simple universal repair part/seal
- · Model 57 chrome-plated, metal trip lever
- 12' rough-in
- · 2' glazed trapway
- The Mansfield® limited lifetime warranty on china; Five-year limited warranty on tank trim
- · Available in White, Biscuit and Bone



Complete toilet kit

COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
382CTK	Elongated front, two-piece toilet kit. Includes: toilet seat, wax toilet ring, floor bolts, caps, and multi-lingual installation instructions. Water supply hardware not included. Specify color.			
382	ongated front toilet bowl only. Less toilet seat. Specify color.			
386	Tank and cover only, with left hand, front-mount, chrome-plated, metal trip lever. Less supply. Specify color.	C ✓®		
3800	Elongated, slow close CTK seat			
TANK TRIM & REPLACEMENT PARTS				
57	Trip lever - chrome-plated, metal trip lever, left hand			
2037-1212	Summit® 1.6 rigid flapper flush valve			
400A	Fluidmaster® anti-siphon pilot fill valve			
2206	Anti-siphon pilot fill valve (compatible replacement)			
630-0030	Replacement flush valve seal			
386-LID	Tank lid			

382CTK SUMMIT®

MANSFIELD®

Complete Toilet Kit, Elongated Front, Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
382CTK	Elongated front, (1.6 gpf/6.0 lpf) two-piece toilet kit	C ®

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	MagnaFlush™ flushing technology
WATER USAGE	1.6 gpf / 6.0 lpf
WATER SURFACE AREA	9' X 10'
ROUGH-IN	12'
MAP RATING	1,000 grams

TRAP DIAMETER	2'
TRAP SEAL	2-1/4'
SHIPPING WEIGHT	Model 382CTK - 93 lbs. (42.1 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited Five Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

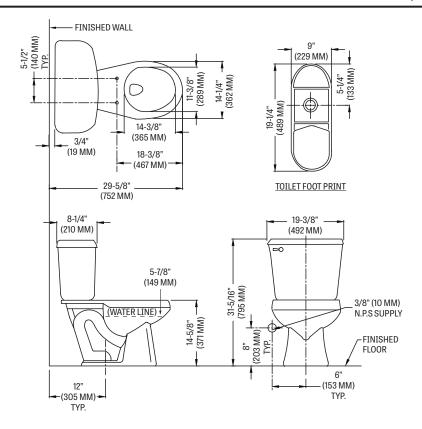

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.