

380-3386 SUMMIT® DUAL FLUSH



Round Front, Vitreous China, Two-Piece Toilet

FEATURES

- Dual flush technology with 3" flush tower
- 1.1 Gpf / 1.6 Gpf (4.0 Lpf / 6.0 Lpf) high efficiency water consumption
- Round front bowl
- SmartFasten™ 3-bolt tank-to-bowl connection
- Pilot operated anti-siphon fill valve
- 12" rough-in
- Model 33 chrome-plated push button actuator
- 2" glazed trapway
- The Mansfield® limited lifetime warranty
- Available in White, Biscuit and Bone



MODEL 380-3386

Toilet seat not included

Available as CTK






ROUND



CTK

COMPONENTS




| MODEL # | DESCRIPTION | CODES/STANDARDS |
|-------------------------------|--|---|
| 380-3386 | Round front, two-piece dual flush toilet. Less toilet seat and supply. Specify color. |    |
| 380 | Round front toilet bowl only. Less supply. Specify color. | |
| 3386 | Tank and cover only with chrome-plated push button actuator. Less supply. Specify color. | |
| TANK TRIM & REPLACEMENT PARTS | | |
| 33 | Chrome-plated push button actuator | |
| 2206 | Pilot operated fill valve | |
| 308 | Dual flush tower | |
| 3386-LID | Tank lid | |

380-3386 SUMMIT® DUAL FLUSH



Round Front, Vitreous China, Two-Piece Toilet

SPECIFICATIONS


| MODEL # | DESCRIPTION | CODES/STANDARDS |
|----------|---|---|
| 380-3386 | Round front, (1.1 gpf/1.6 lpf) two-piece toilet |    |

| | |
|----------------------|--------------------------------|
| MATERIAL | Vitreous China |
| WATER PRESSURE RANGE | 20 to 80 PSI |
| FLUSH SYSTEM | Dual flush with 3' flush tower |
| WATER USAGE | 1.1 gpf / 1.6 lpf |
| WATER SURFACE AREA | 8' X 9' |
| ROUGH-IN | 12' |
| MAP RATING | 800 grams |

| | |
|-----------------|---|
| TRAP DIAMETER | 2' |
| TRAP SEAL | 2-3/8' |
| SHIPPING WEIGHT | Model 380 - 49 lbs. (22.2 kg) Model 3386 - 38 lbs. (17.2 kg) |
| WARRANTY | Vitreous China - Limited Lifetime Tank Trim - Limited One Year |

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

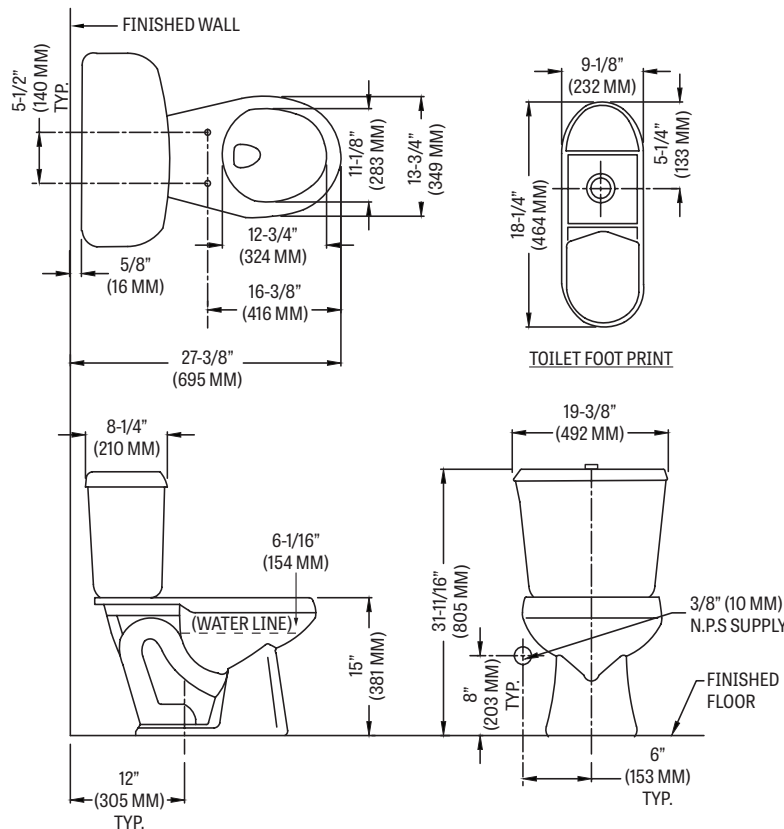

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.