147-155 QUANTUM® 1.28

Elongated Front, Vitreous China, Two-Piece Toilet

FEATURES

- High performance, pressure-assist Flushmate[™] system
- 1.28 gpf / 4.86 lpf low water consumption
- · Elongated front bowl
- 12' rough-in
- Model 45 chrome-plated, metal trip lever
- 2' glazed trapway
- The Mansfield[®] Limited Lifetime Warranty Flushmate five-year limited warranty on vessel
- · Available in white



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS	
147-155	Elongated front, pressure-assist, two-piece toilet. Less toilet seat and supply.		
147	Elongated front, pressure-assist bowl only. Less toilet seat and supply.		
155	Pressure-assist tank and cover only with left hand chrome-plated, metal trip lever. Less supply.		
TANK OPTIONS		TUILET	
155RH	Pressure-assist tank and cover only with right hand chrome-plated, metal trip lever. Less supply.		
TANK TRIM & RI	PLACEMENT PARTS		
45	Trip lever - chrome-plated, metal trip lever, left hand		
FLUSHMATE® 503	Pressure-assist flushing system. Separate warranty applies. Contact FLUSHMATE® at 1-800-533-3460.		

147-155 QUANTUM® 1.28

Elongated Front, Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
147-155	Elongated front (1.28 gpf/4.86 lpf) two-piece toilet	HIGH FFFICIENCY TOLLET

MATERIAL	Vitreous China
WATER PRESSURE RANGE	35 to 80 PSI
FLUSH SYSTEM	Flushmate [™] flushing technology
WATER USAGE	1.28 gpf / 4.86 lpf
WATER SURFACE AREA	8-3/4' X 10-3/8'
ROUGH-IN	12'
MAP RATING	Pending

TRAP DIAMETER	2'
TRAP SEAL	2-1/4'
SHIPPING WEIGHT	Model 147 - 50 lbs. (22 kg) Model 155 - 43 lbs. (19.5 kg)
WARRANTY	Vitreous China - Limited Lifetime Vessel - Limited Five-Year (Flushmate)

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

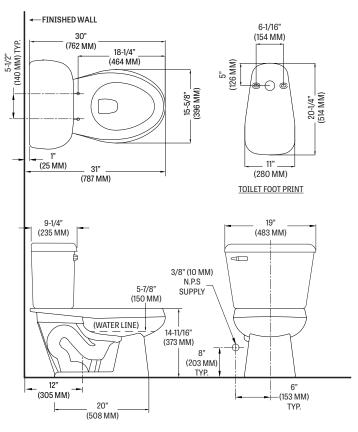

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.