147-153RH **QUANTUMONE**™

MANSFIELD®

Elongated Front, Vitreous China, Two-Piece Toilet

FEATURES

- · Pressure-assist, high efficiency toilet (HET)
- 1.0 gpf / 3.8 lpf ultra-low water consumption
- SAVES up to 40% more water than conventional 1.6 gpf flushing systems
- · Elongated front bowl
- 12' rough-in
- · Model 49RH chrome-plated, metal trip lever
- · 2' glazed trapway
- The Mansfield® Limited Lifetime Warranty
 Flushmate five-year limited warranty on vessel
- · Available in white



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
147-153RH	Elongated front, pressure-assist, two-piece toilet. Less toilet seat and supply.			
147	Elongated front, pressure-assist bowl only. Less toilet seat and supply.			
153RH	Pressure-assist tank and cover only with right hand, chrome-plated, metal trip lever. Less supply.	HIGH EFFICIENCY C C ®		
TANK OPTIONS				
153	Pressure-assist tank and cover only with left hand, chrome-plated, metal trip lever. Less supply.			
TANK TRIM & REPLACEMENT PARTS				
49RH	Trip lever - chrome-plated, metal trip lever, right hand			
FLUSHMATE® 504	Pressure-assist flushing system. Separate warranty applies. Contact FLUSHMATE® at 1-800-533-3460.			

147-153RH **QUANTUMONE**™

MANSFIELD®

Elongated Front, Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
147-153RH	Elongated front (1.0 gpf/3.8 lpf) two-piece toilet	HIGH EFFICIENCY C ®

MATERIAL	Vitreous China
WATER PRESSURE RANGE	35 to 80 PSI
FLUSH SYSTEM	Flushmate IV™ flushing technology
WATER USAGE	1.0 gpf / 3.8 lpf
WATER SURFACE AREA	8-3/4' X 10-3/8'
ROUGH-IN	12'
MAP RATING	Pending

TRAP DIAMETER	2'
TRAP SEAL	2-1/4'
SHIPPING WEIGHT	Model 147 - 50 lbs. (22 kg) Model 153RH - 43 lbs. (19.5 kg)
WARRANTY	Vitreous China - Limited Lifetime Vessel - Limited Five-Year (Flushmate)

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

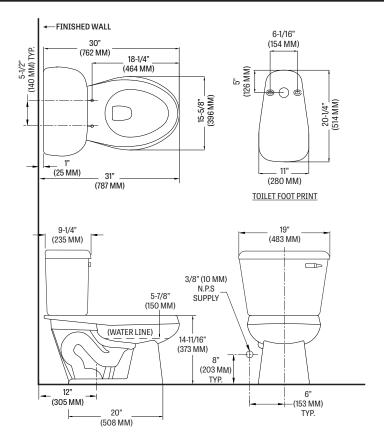

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.