

476 HE  
ARCTIC



Wall-Mount, Wash-Down, Vitreous China Urinal

FEATURES




- Wall-mount, wash-down urinal
- Rim-flushing action
- Minimum 0.5 gpf / 1.9 lpf high efficiency water consumption
- Height 23 7/8", Width 13 1/4", Depth 14 1/4"
- Concealed Integrated trapway
- Includes top spud, wall hanger and outlet spud
- Complies with ADA\* requirements
- The Mansfield® limited lifetime warranty
- Available in White

\*This product is designed to meet ADA requirements when properly installed in accordance with ADA guidelines



MODEL 476 HE

COMPONENTS




| MODEL #             | DESCRIPTION  | CODES/STANDARDS   |
|---------------------|--|---|
| 476 HE              | Vitreous china wash-down (0.5 gpf / 1.9 lpf) urinal. Fitted with 3/4" top spud and 2" outlet spud with bolts. Mounting bracket included. Flushometer not included. |    |
| PARTS & ACCESSORIES |  |   |
| 471-3261            | Urinal hanger  |   |
| 23                  | Rear outlet urinal spud kit, 2" Inside threads   |   |
| 24                  | Urinal top spud - 1" x 3/4" cast brass top urinal spud   |   |

# 476 HE ARCTIC



Wall-Mount, Wash-Down, Vitreous China Urinal

## SPECIFICATIONS

| MODEL # | DESCRIPTION                  | CODES/STANDARDS   |
|---------|------------------------------|---|
| 476 HE  | Wall-mount, wash-down urinal |    |





|             |                   |                 |   |
|-------------|-------------------|-----------------|---|
| MATERIAL    | Vitreous China    | SHIPPING WEIGHT | Gross weight 32.6 lbs (14.8 kg)<br>Net weight: 26 lbs (13.0 kg)   |
| WATER USAGE | 0.5 gpf / 1.9 lpf | WARRANTY        | Vitreous China - Limited Lifetime<br>Tank Trim - Limited One Year |
| INLET       | 3/4"              |                 |   |
| OUTLET      | 2"                |                 |   |
| ROUGH-IN    | Wall-mount        |                 |   |

## TECHNICAL INFORMATION

**Note:** these dimensions are nominal and subject to change without notice.

### TECHNICAL DRAWING

Plano Técnico  
Schémas techniques

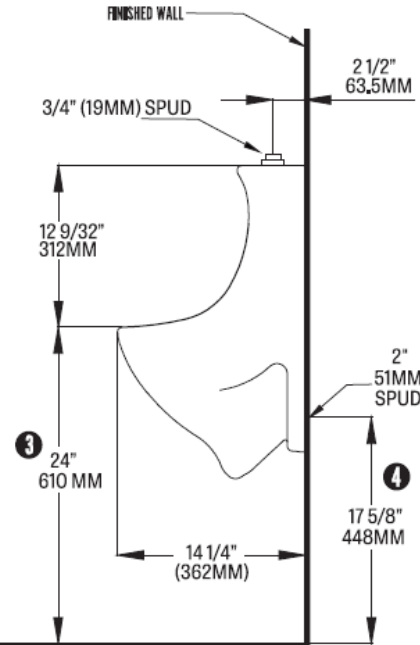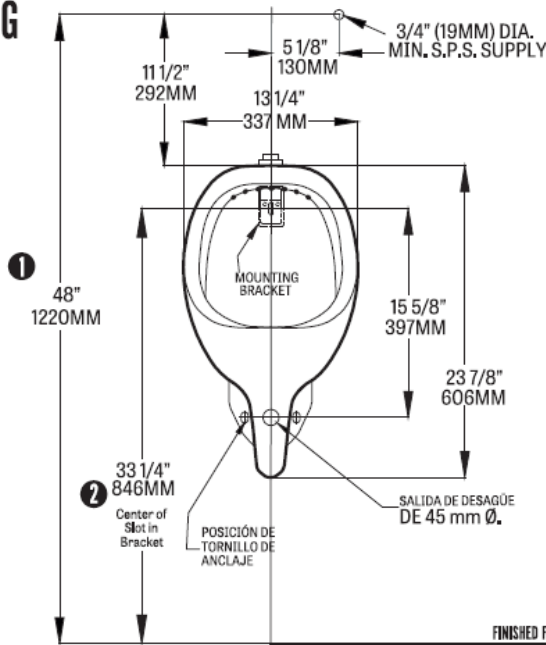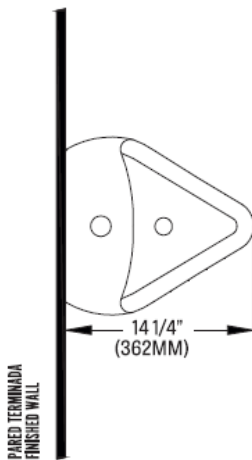

\*Mounting brackets measure  
2-7/8" (73MM) in length

Los soportes de montaje miden  
2-7/8" (73MM) de longitud.

Les supports de montage mesurent  
2-7/8" (73MM) de longueur.

**NOTE on Outlet Connection:**  
2" female threads protrude  
1/2" past the urinal.

Nota sobre Conexión de Salida:  
los hilos de 2" sobresalen 1/2"  
del orinal.

Remarque sur le raccordement  
de la sortie : Les filetages de 2"  
dépassent de 1/2" de l'urinoir.

**FOR ADA Installation adjust the numbered dimensions as follows:**  
Para instalación ADA, ajuste las dimensiones numeradas como se indica:  
Pour une installation ADA, ajuster les dimensions numérotées  
comme indiqué :

|   |                 |
|---|-----------------|
| 1 | 38 1/2" (978MM) |
| 2 | 23 3/4" (603MM) |
| 3 | 14 1/2" (368MM) |
| 4 | 8 1/8" (206MM)  |

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.