

1311NS BALTIC



Elongated Front, Flush Valve Toilet, 10" Rough-in

FEATURES

- Specifically designed for commercial and industrial applications
- 1.28* or 1.6 gpf low water consumption (*when using the proper 1.28 flushometer)
- High performance, high efficiency (HET)
- 1-1/2" top spud provided to accommodate many brands of flush valves
- 10" rough-in
- 2" glazed trapway
- The Mansfield® limited lifetime warranty
- Available in White Biscuit and Bone



MODEL 1311NS

Toilet seat not included



ELONGATED

COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS
1311NS	Elongated front, flush valve toilet bowl. Less toilet seat, flush valve and supply. Specify color.	 

1311NS BALTIC



Elongated Front, Flush Valve Toilet, 10" Rough-in

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
1311NS	Elongated front, (*1.28 or 1.6 gpf / 4.86 or 6.05 lpf) flush valve toilet	 

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	Siphon jet technology
WATER USAGE	1.28 or 1.6 gpf / 4.86 or 6.05 lpf
WATER SURFACE AREA	9-3/4" X 11-1/2"
ROUGH-IN	10"
MAP RATING	1,000 grams

TRAP DIAMETER	2"
TRAP SEAL	2-1/2"
SHIPPING WEIGHT	Model 1311NS - 53 lbs. (24 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

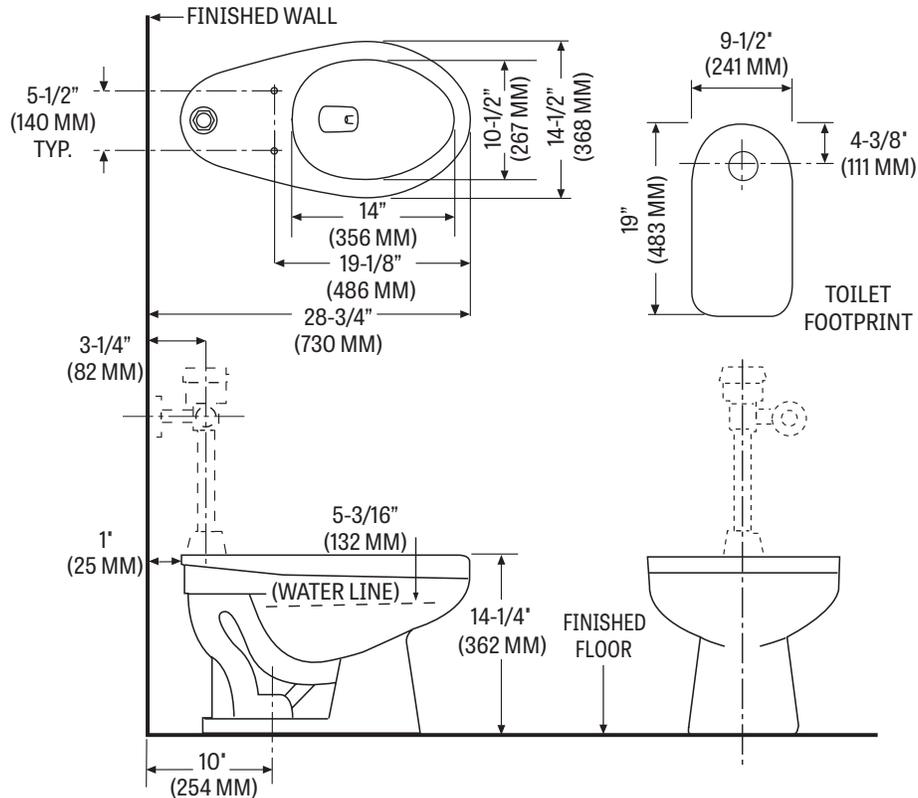

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.