




INSTALLATION INSTRUCTIONS - INSTRUCCIONES DE INSTALACIÓN

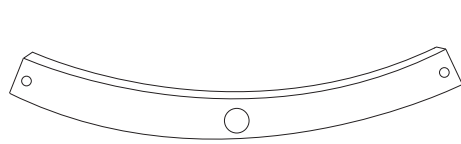


Corrosion resistant metal mounting bracket
Platina en acero inoxidable calibre 16



Qty 2 - 5/16-18 bolts to attach metal
bracket to bowl
2 Tornillos de 5/16 X 2" fijos a la
platina




Qty 3 - 5/16 -18 retaining nuts
3 Tuercas de 5/16"




Qty 2 - Washers
2 Arandelas de 5/16"

To use with toilet tanks model 119, 123 and 153 - Para usar con tanques modelo 119, 123 y 153.

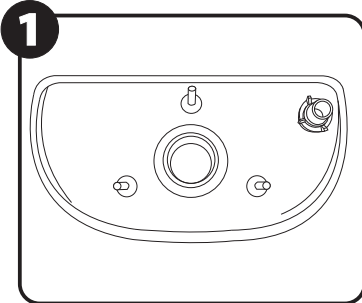


Place the pressure assist tank upside down on a flat level work surface. Verify that the above pictured parts are included with the model 144 bowl. Place the rubber tank to bowl gasket from the parts bag included with the tank on the outlet discharge nut on the bottom of the vessel.

Tanque ensamblado con flush mate y con los tornillos de fijación a la taza ajustados en la parte interna con empaque de caucho y en la parte externa con arandela y tuerca metálica.

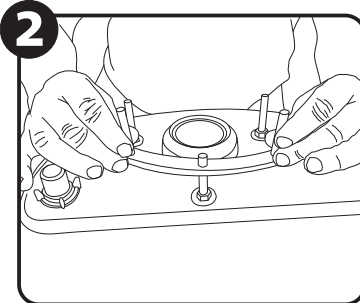


Place the two bolts provided with the metal bracket through the outer two holes of the mounting bracket as shown. Next, while holding the bolts in place inside the mounting bracket, align and lower the bracket over the rearward hole in the tank so that it is aligned with the center hole in the bracket.

Se ensambla la platina en el tanque, tornillo hueco trasero individual.

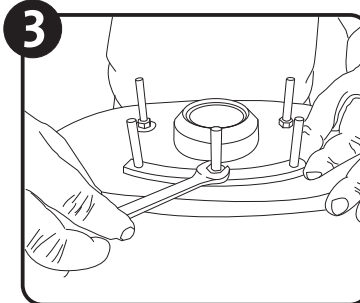


Now, take one of the three nuts included with the mounting bracket kit and screw it on the threads protruding from the center hole on the bracket. Using a 1/2" wrench, tighten the nut to secure the mounting bracket in place.

Ya acomodada la platina de una forma simétrica entre los tornillos fijos del tanque y los de la platina, se ajusta el tornillo del centro con la tuerca de 5/16".

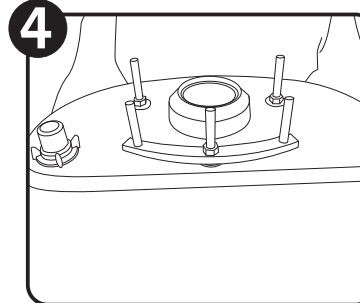


The tank is now ready to position on the bowl.

Tanque con la platina instalada lista para su fijación a la taza.

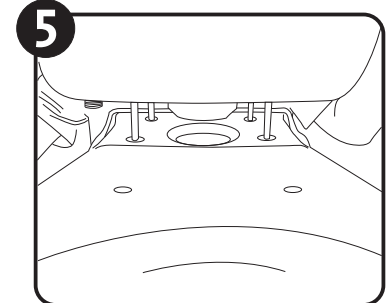


Gently lower the tank into position on the bowl, assuring that all five protruding through the bottom of the tank are aligned with the five mounting holes on the bowl.

Se va acoplando el tanque a la taza de una forma uniforme guiada por los 5 tornillos de fijación.

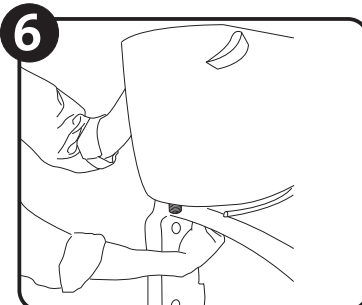


Using the bowl 5/16" nuts and washers from the bracket kit and a 5/16" nut and washer from the tank install kit, proceed to install them on the protruding bolts on the underside of the bowl tank shelf. Hang tighten all four nuts.

Para ensamblar el tanque a la taza se debe primero ajustar los 2 tornillos traseros, con las arandelas y tuercas de 5/16"; para esto se hace presión del tanque hacia atrás con ayuda de la mano.

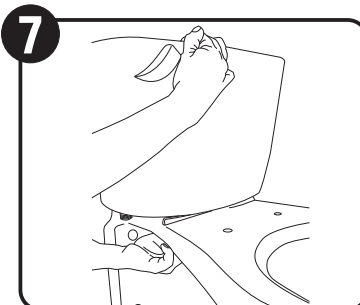


To further aid in tightening, use one hand to pull the tank down-ward as you continue to tighten the nuts by hand. As you pull down on the front of the tank, tighten the front two nuts. Now pull down on the rear of the tank and tighten the two rear nuts. Please note to try to keep the tank level and even in the tightening process.

Se ajustan los 2 tornillos de delante de forma alterna, con las arandelas y tuercas de 5/16"; haciendo presión con la mano al tanque hacia adelante.

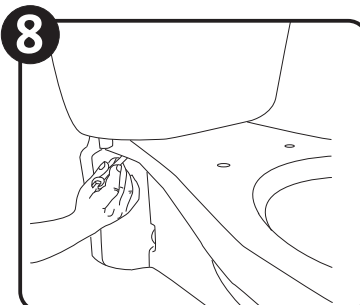

For final tightening, use a level on the tank and a 1/2" wrench, uniformly tighten all four nuts so the tank is level. It is best to use an alternating sequence to achieve an even bolt down of the tank. The tank should be just touching the sanitary bar on the bowl and the top of the metal bracket when properly tightened down.

Para un buen acople entre el tanque y la taza, se ajusta las tuercas con ayuda de una llave boca fija de 1/2"; esto se hace alternativamente con las 4 tuercas.

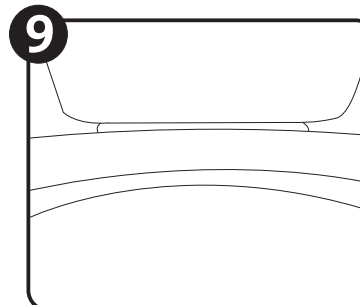

After final assembly, please flush the unit several times to check for leaks and proper operation. The tank should be just touching the sanitary bar on the bowl and the top of the metal bracket when properly tightened down.

Se verifica que el tanque en la taza este nivelado y acoplado perfectamente.

www.mansfieldplumbing.com
1430 George Road, Ashland, OH 44805
877-850-3060
custsrvs@mansfieldplumbing.com

MANSFIELD®

SAP: 22000009858