117CTK PRO-FIT®4

MANSFIELD®

Complete Toilet Kit, Round Front, SmartHeight™, Vitreous China, Two-Piece Toilet

FEATURES

- · Complete toilet kit (CTK)
- · 3-bolt SmartFasten™ tank-to-bowl connection
- 1.6 gpf / 6.0 lpf low water consumption
- Round front SmartHeight[™] bowl
- 2" flush tower
- · Fluidmaster® anti-siphon pilot fill valve
- 12" rough-in
- · Model 40 chrome-plated plastic trip lever
- · 2" glazed trapway
- · Mansfield® limited lifetime warranty
- · Available in White



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
117CTK	Round front, SmartHeight™, two-piece toilet kit. Includes: toilet seat, wax toilet ring, floor bolts, caps, and multi-lingual installation instructions. Water supply hardware not included.			
117	Round front, SmartHeight™ toilet bowl only. Less toilet seat.	Upo E		
160	Tank and cover only with left hand, front-mount, chrome-plated, plastic trip lever. Fluidmaster® anti-siphon pilot fill valve. Less supply.	C ® ADA COMPLIANT		
SB100	Round, closed front, plastic toilet seat and cover.			
TANK TRIM & REPLACEMENT PARTS				
40	Trip lever - chrome-plated plastic trip lever, left hand			
211-1112	Flush tower			
400A	Fluidmaster® anti-siphon pilot fill valve			
630-0030	Replacement flush valve seal			
160-LID	Tank lid			

When properly installed, this product meets the requirements for the Americans with Disabilities Act of 1990 (ADA). Refer to local plumbing codes, as they may vary by location and application.

117CTK PRO-FIT®4

MANSFIELD®

Complete Toilet Kit, Round Front, SmartHeight™, Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
117CTK	Round front SmartHeight™ (1.6 gpf / 6.0 lpf) two-piece, complete toilet kit.	C ® ADA COMPLIANT

	l
MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	2" Flush Tower
WATER USAGE	1.6 gpf / 6.0 lpf
WATER SURFACE AREA	8" X 9"
ROUGH-IN	12"
MAP RATING	800 grams

TRAP DIAMETER	2"
TRAP SEAL	2-7/8"
SHIPPING WEIGHT	
	Model 117CTK - 85 lbs. (38.5 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

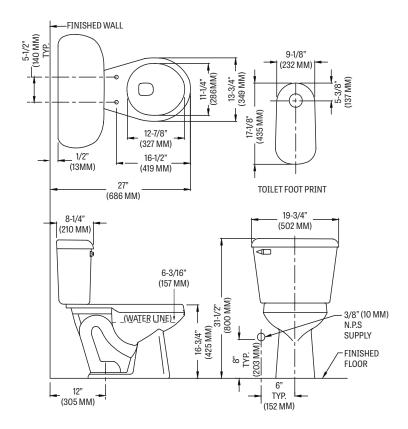

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.