

# 147-123RH QUANTUM®

**MANSFIELD®**


Elongated Front, Vitreous China, Two-Piece Toilet

## FEATURES

- High performance, pressure-assist Flushmate III™ system
- 1.6 gpf / 6.0 lpf low water consumption
- Elongated front bowl
- 12" rough-in
- Model 49RH chrome-plated, metal trip lever
- 2-1/8" glazed trapway
- The Mansfield® limited lifetime warranty on china, Flushmate ten-year limited warranty on vessel
- Available in White, Biscuit and Bone




## COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS
147-123RH	Elongated front, pressure-assist, two-piece toilet. Less toilet seat and supply. Specify color.	
147	Elongated front, pressure-assist bowl only. Less toilet seat and supply. Specify color.	
123RH	Pressure-assist tank and cover only with right hand chrome-plated, metal trip lever. Less supply. Specify color.	
TANK OPTIONS		
123	Pressure-assist tank and cover only with left hand chrome-plated, metal trip lever. Less supply. Specify color.	
122	Pressure-assist tank and cover only with chrome-plated, plastic push button actuator. Less supply. Specify color.	
TANK TRIM & REPLACEMENT PARTS		
49RH	Trip lever - chrome-plated, metal trip lever, right hand	
125-LID	Tank lid	
FLUSHMATE® 503	Pressure-assist flushing system. Separate warranty applies. Contact FLUSHMATE® at 1-800-533-3460.	



### Elongated Front, Vitreous China, Two-Piece Toilet

## SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
147-123RH	Elongated front (1.6 gpf / 6.0 lpf) two-piece toilet	

<b>MATERIAL</b>	Vitreous China
<b>WATER PRESSURE RANGE</b>	35 to 80 PSI
<b>FLUSH SYSTEM</b>	Flushmate III™ flushing technology
<b>WATER USAGE</b>	1.6 gpf / 6.0 lpf
<b>WATER SURFACE AREA</b>	9-7/8" X 12-1/4"
<b>ROUGH-IN</b>	12"
<b>MAP RATING</b>	800 grams

<b>TRAP DIAMETER</b>	2-1/8"
<b>TRAP SEAL</b>	2-7/8"
<b>SHIPPING WEIGHT</b>	Model 147 - 55 lbs. (25 kg) Model 123RH - 43 lbs. (19.5 kg)
<b>WARRANTY</b>	Vitreous China - Limited Lifetime Vessel - Limited Ten Year (Flushmate)

## TECHNICAL INFORMATION

**Note:** these dimensions are nominal and subject to change without notice.

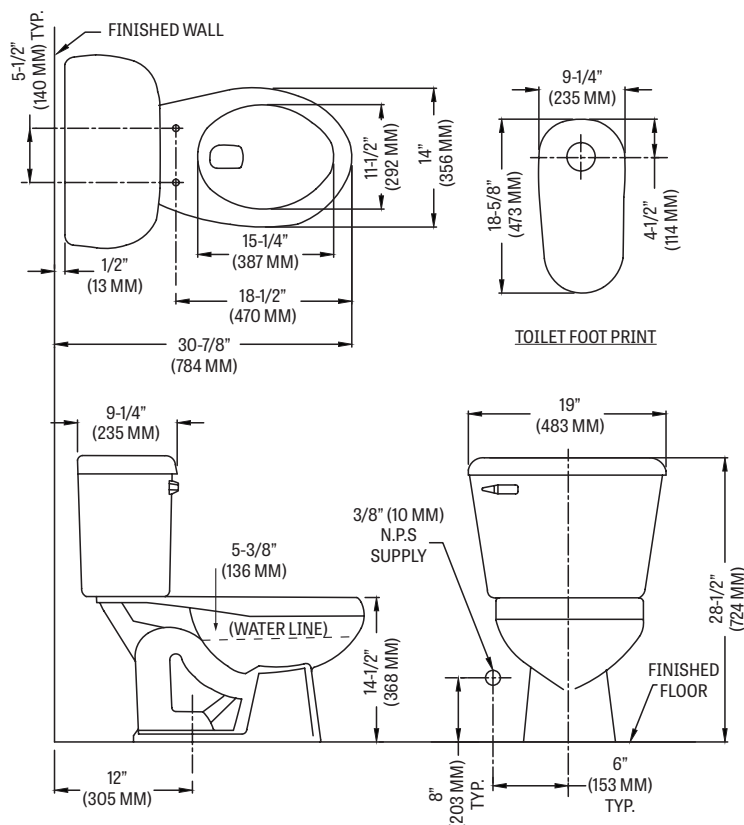

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.

