

1319RS ADRIATIC™



Elongated Front, SmartHeight™, Rear Spud, Flush Valve Toilet

FEATURES

- Designed for commercial and industrial applications
- 1.28* or 1.6 gpf low water consumption (*when using the proper 1.28 flushometer)
- High performance, high efficiency (HET)
- Elongated front, SmartHeight™ bowl
- ADA compliant
- 1-1/2' rear spud provided to accommodate many brands of flush valves
- 10" rough-in
- 2' glazed trapway
- The Mansfield® limited lifetime warranty
- Available in White






MODEL 1319RS

Toilet seat not included



ELONGATED

COMPONENTS




MODEL #	DESCRIPTION	CODES/STANDARDS
1319RS	Elongated front, SmartHeight™, toilet bowl. Less toilet seat, flush valve and supply.	   <p>HIGH EFFICIENCY TOILET C ADA COMPLIANT</p>

1319RS ADRIATIC™



Elongated Front, SmartHeight™, Rear Spud, Flush Valve Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
1319RS	Elongated front, SmartHeight™, floor mount, flush valve toilet	  

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	Siphon jet technology
WATER USAGE	1.28 or 1.6 gpf / 4.86 or 6.05 lpf
WATER SURFACE AREA	9-1/2' X 11-1/2'
ROUGH-IN	10'
MAP RATING	1,000 grams

TRAP DIAMETER	2-1/8"
TRAP SEAL	2-3/8"
SHIPPING WEIGHT	Model 1319RS - 58 lbs. (26 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

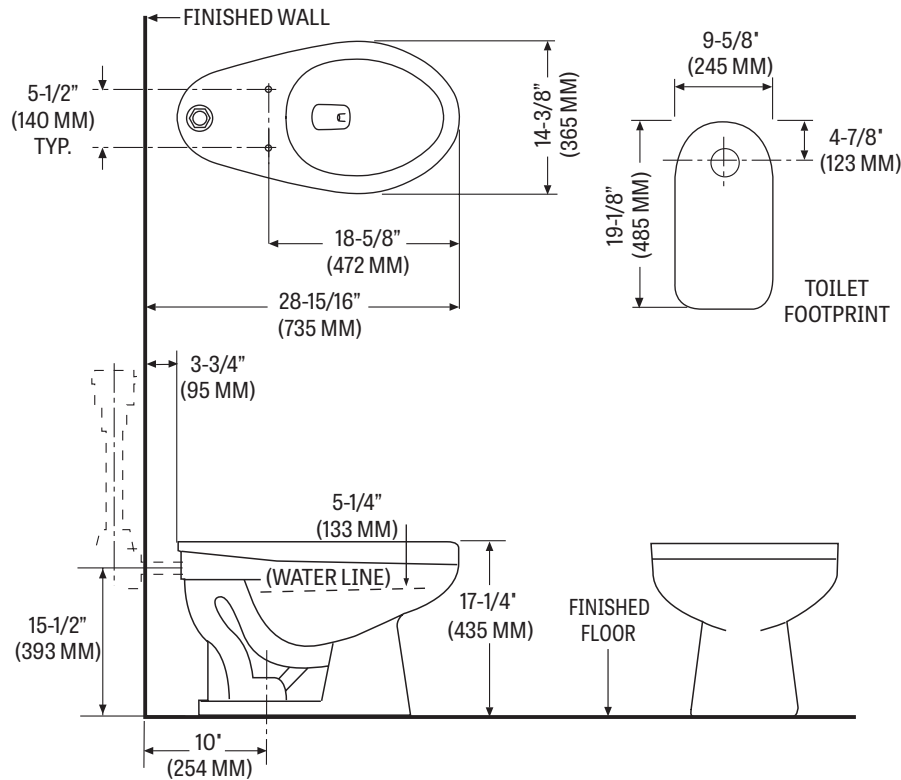

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.