130-173 **ALTO**®

Round Front, Vitreous China, Two-Piece Toilet

FEATURES

- 3-bolt SmartFasten[™] tank-to-bowl connection
- 1.6 gpf / 6.0 lpf low water consumption
- Round front bowl
- 2" flapper flush valve
- Fluidmaster® anti-siphon pilot fill valve
- 12" rough-in
- Model 31 color-match, plastic trip lever
- 2" glazed trapway
- The Mansfield[®] Limited Lifetime Warranty
- Available in White, Biscuit, and Bone



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
130-173	Round front, two-piece toilet			
130	Round front, toilet bowl only. Less toilet seat. Specify color.			
173	Tank and cover only with left hand, front-mount, color-match, plastic trip lever. Fluidmaster [®] anti-siphon pilot fill valve and 2" flapper. Less supply. Specify color.	c to		
TANK TRIM & RE	TANK TRIM & REPLACEMENT PARTS			
31	Trip lever - color-match, plastic trip lever, left hand			
203A	2" Flapper flush valve			
400A	Fluidmaster® anti-siphon pilot fill valve			
2206	Anti-siphon pilot fill valve (compatible replacement)			
630-0173	2" Replacement flapper kit			
160-LID	Tank lid			

Round Front, Vitreous China, Two-Piece Toilet

SPECIFICATIONS

TANK OPTIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
130-173	Round front (1.6 gpf / 6.0 lpf) two-piece toilet	C C C

MATERIAL	Vitreous China	
WATER PRESSURE RANGE	20 to 80 PSI	
FLUSH SYSTEM	2" Flapper flush valve	
WATER USAGE	1.6 gpf / 6.0 lpf	
WATER SURFACE AREA	8" X 9"	
ROUGH-IN	12"	
MAP RATING	800 grams	

TRAP DIAMETER	2"	
TRAP SEAL	2-5/8"	
SHIPPING WEIGHT	Model 130 - 46 lbs. (21 kg) Model 173 - 34 lbs. (15 kg)	
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year	

TECHNICAL INFORMATION
Note: these dimensions are nominal and s

		-
160	Standard 1.6 gpf configuration: 2" flush tower, anti-siphon ballcock, left hand, chrome trip lever.	€ FINISHED WALL
160RH	Variation of model 160, with right hand trip lever.	5-1/2"
161	Variation of model 160, with Fluidmaster® anti- siphon pilot fill valve.	
165	Variation of model 160, with cover lock.	
170	Variation of model 160, with tank liner.	12-5/8"
172	Variation of model 160, with Fluidmaster® anti- siphon pilot fill valve, 2" flapper and chrome trip lever.	
173	Variation of model 160, with Fluidmaster [®] anti- siphon pilot fill valve, 2" flapper and color-match trip lever.	8-1/4" (210 MM)
173RH	Variation of model 173, with right hand trip lever.	P II P
174	Variation of model 173, with tank liner.	6-1/16" (154 MM
175	Variation of model 160, with cover lock and tank liner.	
180	Variation of model 160, with color-match trip lever.	
181	Variation of model 160, with Fluidmaster® anti- siphon pilot fill valve and color-match trip lever.	
190	Variation of model 160, with color-match trip lever and tank liner.	(305 MM)
125	Variation of model 160, with 14" rough-in.	

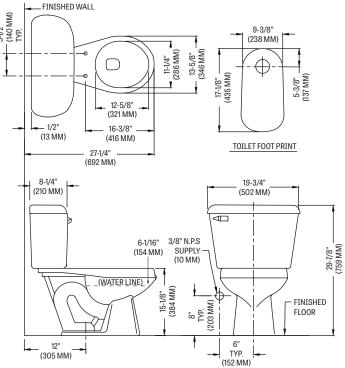

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.

Mansfield Plumbing Products, LLC • Customer Service Toll Free 877-850-3060 • Fax 419-938-6234 www.mansfieldplumbing.com • Email: custserv@mansfieldplumbing.com