

117-3125 ALTO[®] 1.28

MANSFIELD[®]

Round Front, SmartHeight™, Vitreous China, Two-Piece Toilet

FEATURES

- 3-bolt SmartFasten™ tank-to-bowl connection
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- Uses 20% less water than conventional toilets
- Round front SmartHeight™ bowl
- 3-2" hybrid flapper flush valve
- Fluidmaster® anti-siphon pilot fill valve
- 14" rough-in
- Model 31 color-match, plastic trip lever
- 2" glazed trapway
- The Mansfield® Limited Lifetime Warranty
- Available in White



MODEL 117-3125

Toilet seat not included



ROUND



SMARTHEIGHT ADA

COMPONENTS

| MODEL # | DESCRIPTION | CODES/STANDARDS |
|-------------------------------|---|---|
| 117-3125 | Round front, SmartHeight™ two-piece toilet. |    <p>HIGH EFFICIENCY TOILET C ADA COMPLIANT</p> |
| 117 | Round front, SmartHeight™ toilet bowl only. Less toilet seat. Specify color. | |
| 3125 | Tank and cover only with left hand, front-mount, color-match, plastic trip lever. Fluidmaster® anti-siphon pilot fill valve. Less supply. | |
| TANK TRIM & REPLACEMENT PARTS | | |
| 31 | Trip lever – color-match, plastic trip lever, left hand | |
| 228 | 3-2" Hybrid flapper flush valve | |
| 400A | Fluidmaster® anti-siphon pilot fill valve | |
| 2206 | Anti-siphon pilot fill valve (compatible replacement) | |
| 630-0207 | 3" Replacement flapper kit | |
| 160-LID | Tank lid | |

When properly installed, this product meets the requirements for the Americans with Disabilities Act of 1990 (ADA). Refer to local plumbing codes, as they may vary by location and application.



117-3125 ALTO[®] 1.28



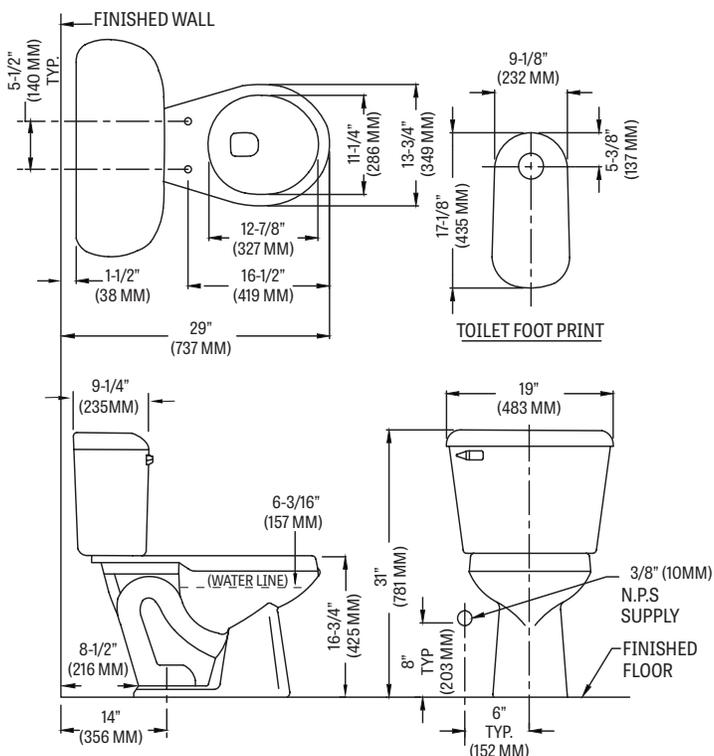
Round Front, SmartHeight™, Vitreous China, Two-Piece Toilet

SPECIFICATIONS

| MODEL # | DESCRIPTION | CODES/STANDARDS |
|----------|--|---|
| 117-3125 | Round front SmartHeight™ (1.28 gpf / 4.8 lpf) two-piece toilet |    |

| | |
|----------------------|---------------------------------|
| MATERIAL | Vitreous China |
| WATER PRESSURE RANGE | 20 to 80 PSI |
| FLUSH SYSTEM | 3-2" Hybrid flapper flush valve |
| WATER USAGE | 1.28 gpf / 4.8 lpf |
| WATER SURFACE AREA | 8' X 9' |
| ROUGH-IN | 14" |
| MAP RATING | 800 grams |

| | |
|-----------------|---|
| TRAP DIAMETER | 2' |
| TRAP SEAL | 2-7/8" |
| SHIPPING WEIGHT | Model 117 - 49 lbs. (22 kg) Model 3125 - 34 lbs. (15 kg) |
| WARRANTY | Vitreous China - Limited Lifetime Tank Trim - Limited One Year |

| TANK OPTIONS | TECHNICAL INFORMATION | | | | | | | | | | | | |
|---|---|---|--------|---|------|---|------|---|------|---|------|--|--|
| | Note: these dimensions are nominal and subject to change without notice. | | | | | | | | | | | | |
| <table border="1"> <tbody> <tr> <td>3173</td> <td>Standard 1.28 gpf configuration: 3-2" hybrid flapper flush valve, Fluidmaster® anti-siphon pilot fill valve, left hand, color-match trip lever.</td> </tr> <tr> <td>3173RH</td> <td>Variation of model 3173, with right hand, color-match trip lever.</td> </tr> <tr> <td>3165</td> <td>Variation of model 3173, with cover lock.</td> </tr> <tr> <td>3174</td> <td>Variation of model 3173, with tank liner.</td> </tr> <tr> <td>3120</td> <td>Variation of model 3173, with left hand, chrome trip lever.</td> </tr> <tr> <td>3125</td> <td>Variation of model 3173, 14" rough-in.</td> </tr> </tbody> </table> | 3173 | Standard 1.28 gpf configuration: 3-2" hybrid flapper flush valve, Fluidmaster® anti-siphon pilot fill valve, left hand, color-match trip lever. | 3173RH | Variation of model 3173, with right hand, color-match trip lever. | 3165 | Variation of model 3173, with cover lock. | 3174 | Variation of model 3173, with tank liner. | 3120 | Variation of model 3173, with left hand, chrome trip lever. | 3125 | Variation of model 3173, 14" rough-in. |  |
| 3173 | Standard 1.28 gpf configuration: 3-2" hybrid flapper flush valve, Fluidmaster® anti-siphon pilot fill valve, left hand, color-match trip lever. | | | | | | | | | | | | |
| 3173RH | Variation of model 3173, with right hand, color-match trip lever. | | | | | | | | | | | | |
| 3165 | Variation of model 3173, with cover lock. | | | | | | | | | | | | |
| 3174 | Variation of model 3173, with tank liner. | | | | | | | | | | | | |
| 3120 | Variation of model 3173, with left hand, chrome trip lever. | | | | | | | | | | | | |
| 3125 | Variation of model 3173, 14" rough-in. | | | | | | | | | | | | |

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.

