
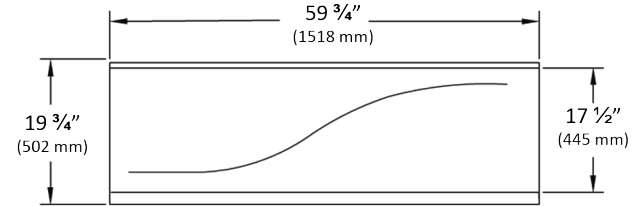



# PRO-FIT® WHIRLPOOL & BATHTUB

3660 59 3/4" x 35 3/4" x 21 1/4"



Model number: 6018/6518

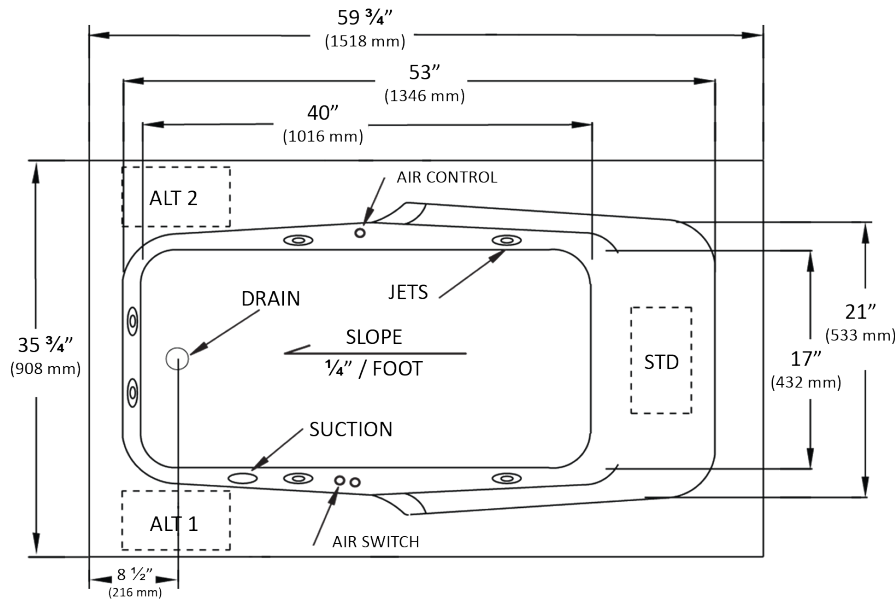

OPTIONAL REMOVABLE APRON

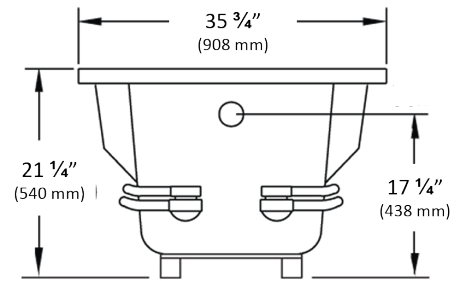

CENTER OVERFLOW

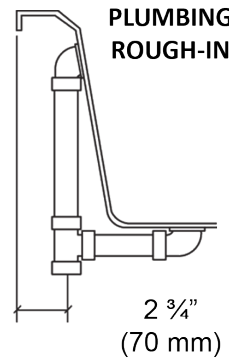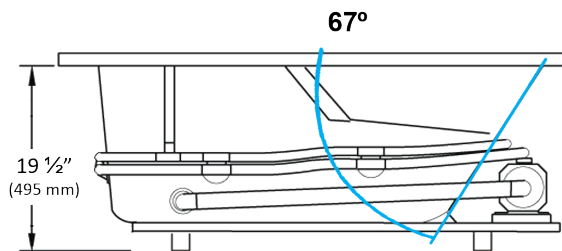

PLUMBING ROUGH-IN

**NOTES:**

1. Pump locations shown for clarity. Specify when ordering STD - Standard or ALT1 - Alternate 1 or ALT2 - Alternate 2.
2. Required pump motor access is 20" W x 15" H.
3. Measurements may vary 1/4" (+/-)
4. If a factory installed nailing flange is added to a unit, add 1/8" to each side flanged.
5. Optional Removable Apron is available for this unit.
6. These dimensions are nominal and subject to change without notice.

**SPECIFICATIONS:**

Dimensions:	60" x 36" x 21 1/4"	Number of jets:	6
Material:	Acrylic, fiberglass reinforced	Weight:	120 lbs.
Pump Motor:	120 V, 60 HZ, 6.0 Amp, Single Speed, Premounted	Water Capacity:	45 gals max., 32 gals min.
Electrical Requirements:	120 V, 15 Amp, GFCI Protected	Floor Loading:	47 lbs./sq.ft. (229 kg/m <sup>2</sup> )
On/Off Control:	Air Switch	Shipping Weight:	140 lbs. / 120 lbs.