

2148CTK QUANTUM ONE™



Complete Toilet Kit, Elongated Front, SmartHeight™, Vitreous China, Two-Piece Toilet

FEATURES

- Complete toilet kit (CTK)
- High performance pressure-assist, high efficiency toilet (HET)
- 1.0 gpf / 3.8 lpf high efficiency water consumption
- Saves almost 40% more water than conventional 1.6 gpf flushing systems
- Elongated front, SmartHeight™ bowl
- 12" rough-in
- Model 45 chrome-plated, metal trip lever
- 2-1/8" glazed trapway
- The Mansfield® limited lifetime warranty on china, Flushmate ten-year limited warranty on vessel
- Available in White



MODEL 2148CTK			
Toilet seat included	ELONGATED	SMARTHEIGHT ADA	CTK
Complete toilet kit			

COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS
2148CTK	Elongated front, SmartHeight™, pressure-assist two-piece toilet kit. Includes: toilet seat, wax toilet ring, floor bolts, caps, and multi-lingual installation instructions. Water supply hardware not included.	    
148	Elongated front, SmartHeight™ pressure-assist bowl only. Less toilet seat and supply.	
153	Pressure-assist tank and cover only with left hand, chrome-plated, metal trip lever. Less supply.	
3800	Elongated, slow close CTK toilet seat and cover.	
TANK TRIM & REPLACEMENT PARTS		
45	Trip lever - chrome-plated, metal trip lever, left hand	
125-LID	Tank lid	
FLUSHMATE® 504	Pressure-assist flushing system. Separate warranty applies. Contact FLUSHMATE® at 1-800-533-3460.	



2148CTK QUANTUM ONE™



Complete Toilet Kit, Elongated Front, SmartHeight™, Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
148-153	Elongated front, SmartHeight™ (1.0 gpf / 3.8 lpf) two-piece toilet kit	    

MATERIAL	Vitreous China
WATER PRESSURE RANGE	35 to 80 PSI
FLUSH SYSTEM	Flushmate IV™ flushing technology
WATER USAGE	1.0 gpf / 3.8 lpf
WATER SURFACE AREA	9-1/4" X 11-3/8"
ROUGH-IN	12"
MaP RATING	1,000 grams

TRAP DIAMETER	2-1/8"
TRAP SEAL	3"
SHIPPING WEIGHT	Model 2148CTK - 108 lbs. (49 kg)
WARRANTY	Vitreous China - Limited Lifetime Vessel - Limited Ten Year (Flushmate)

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

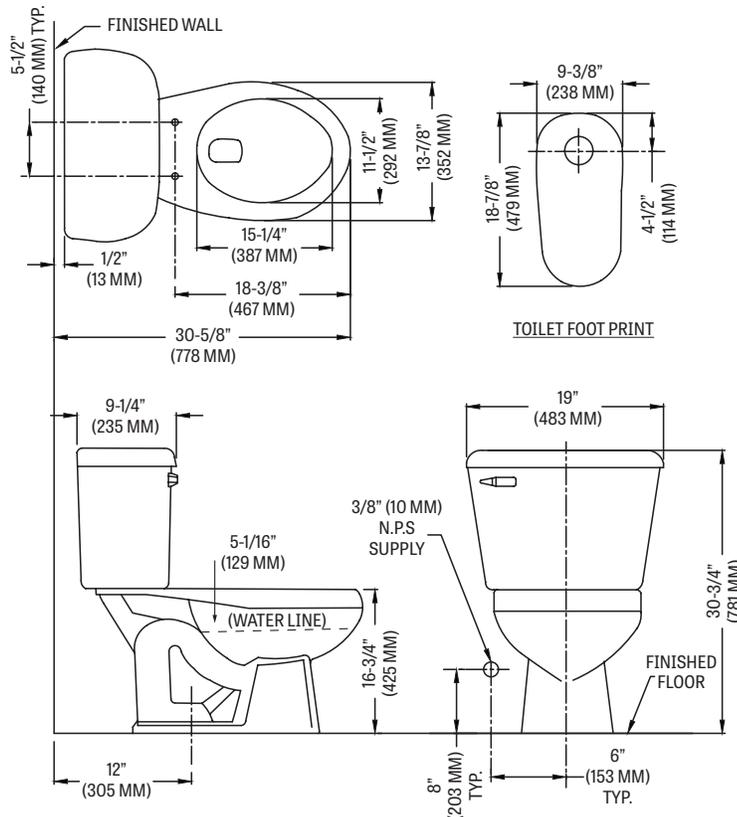

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.

