

4115-3106 BARRETT™ 1.28

MANSFIELD®

Elongated Front, ADA*, SmartHeight, Vitreous China, Two-Piece Toilet





FEATURES

- Concealed trapway for easier cleaning
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- Elongated front, SmartHeight bowl
- Complies with ADA requirements for accessibility
- High performance MagnaFlush™ flushing technology
- 3" flush valve
- Pilot operated anti-siphon fill valve
- 12" rough-in
- Model 69 side-mount metal trip lever
- 2-1/8" glazed trapway
- The Mansfield® limited lifetime warranty
- Available in White

*Meets ADA height requirement when installed with a regular toilet seat



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS
4115-3106 (411510000 - 310610000)	Elongated front, ADA*, SmartHeight, two-piece toilet.	   
4115 (411510000)	Elongated front, ADA*, SmartHeight toilet bowl only. Toilet seat not included.	
3106 (310610000)	Tank and cover only, with left hand, side-mount, chrome-plated, metal trip lever. Supply not included.	
TANK TRIM & REPLACEMENT PARTS		
69	Trip lever - side-mount, chrome-plated, metal trip lever, left hand	
2206	Pilot operated fill valve	
630-0207	Replacement flapper	
106-LID	Tank lid	

4115-3106 BARRETT™ 1.28



Elongated Front, ADA*, SmartHeight, Vitreous China, Two-Piece Toilet


SPECIFICATIONS

MODEL #	DESCRIPTION	CODES/STANDARDS
4115-3106	Elongated front, SmartHeight (1.28gpf/4.8 lpf) two-piece toilet	

MATERIAL	Vitreous China	TRAP DIAMETER	2-1/8"
WATER PRESSURE RANGE	20 to 80 PSI	TRAP SEAL	2-1/4"
FLUSH SYSTEM	3" MagnaFlush™ flushing technology	SHIPPING WEIGHT	Model 4115- 69 lbs. (31 kg) Model 3106- 40 lbs. (18 kg)
WATER USAGE	1.28 gpf / 4.8 lpf	WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year
WATER SURFACE AREA	8-1/4" X 10-3/8"		
ROUGH-IN	12"		
MAP RATING	800 grams		

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

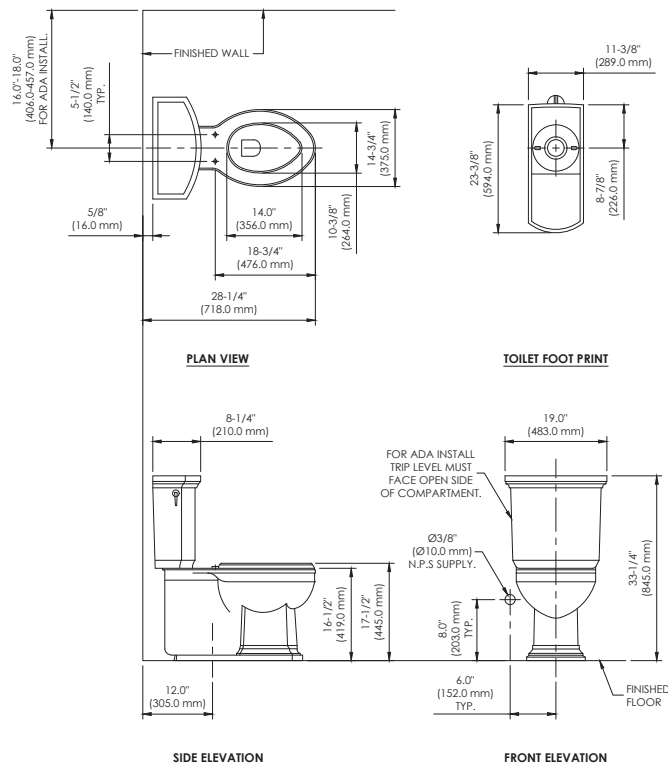

* TOILET SEAT NOT INCLUDED, DIMENSIONS HERE REPRESENT AN STANDARD TOILET SEAT.

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.