

9011
ERIE™



Wall-Mount, Rear Outlet, Elongated Front, ADA*, Flush Valve Toilet, 1.1 to 1.6 gpf water consumption




FEATURES

- Perfect for clinical applications
- Water consumption ranges from 1.1 to 1.6 gallons per flush, depending on the flush valve used
- Elongated front bowl
- 1-1/2" top spud for flush valve installation that accommodates many brands of flush valves
- High performance, high efficiency (HET) when using the proper flushometer
- The Mansfield® Limited lifetime warranty
- Available in White only

*This product is designed to meet ADA requirements When properly installed in accordance with ADA guidelines



COMPONENTS




| MODEL # | DESCRIPTION | CODES/STANDARDS |
|---------------------|--|--|
| 9011 (130130001) | Wall-mount, rear outlet, ADA*, elongated front toilet bowl. Includes a 1-1/2" top spud for flush valve installation. Not included: carrier mounting system, wall bolts, caps, toilet seat and flush valve. |  HIGH EFFICIENCY TOILET  C  ADA COMPLIANT |

9011
ERIE™

MANSFIELD®

Wall-Mount, Rear Outlet, Elongated Front, ADA*, Flush Valve Toilet, 1.1 to 1.6 gpf water consumption

SPECIFICATIONS


| MODEL # | DESCRIPTION | CODES/STANDARDS |
|---------|---|---|
| 9011 | Elongated front, (1.1 to 1.6 gallons per flush) wall mount bowl |    HIGH EFFICIENCY TOILET C ADA COMPLIANT |

| | |
|----------------------|------------------------------|
| MATERIAL | Vitreous China |
| WATER PRESSURE RANGE | 20 to 80 PSI |
| FLUSH SYSTEM | Siphon jet technology |
| WATER USAGE | 1.1 to 1.6 gallons per flush |
| WATER SURFACE AREA | 8-1/2" X 10-1/2" |
| ROUGH-IN | Rear outlet |
| MAP RATING | 1,000 grams |

| | |
|-----------------|---|
| TRAP DIAMETER | 1-7/8" |
| TRAP SEAL | 2-1/8" |
| SHIPPING WEIGHT | Model 9011 - 54 lbs. (25 kg) |
| WARRANTY | Vitreous China - Limited Lifetime Tank Trim - Limited One Year |

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

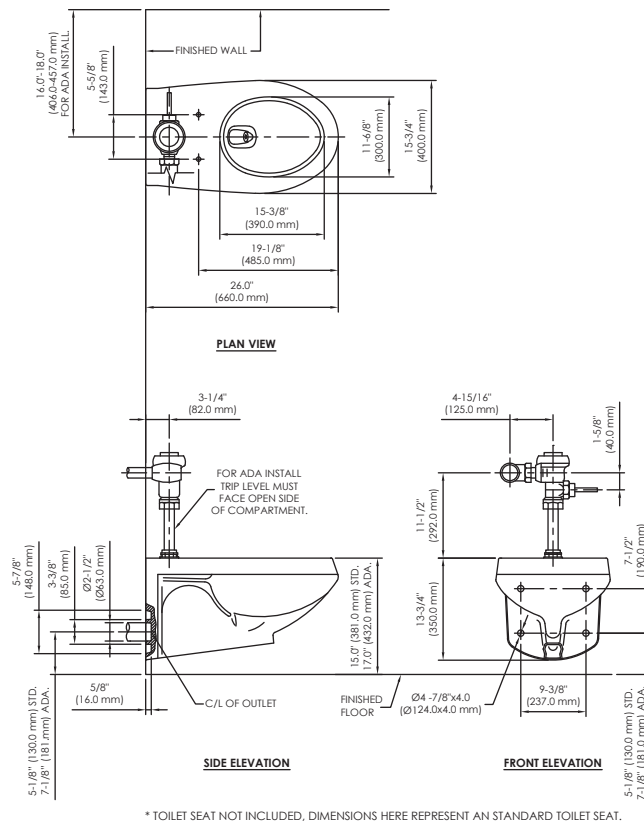

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.