

710CTK (071010017)
BROADWAY™







Elongated SmartHeight™, Vitreous China, Two-Piece Complete Toilet Kit

FEATURES

- Complete toilet kit (CTK)
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- Elongated SmartHeight bowl
- Skirted bowl design conceals trapway
- 2-bolt standard tank-to-bowl connection
- 3" flapper flush valve
- Anti-siphon pilot fill valve
- 12" rough-in
- Chrome trip lever
- 2" glazed trapway
- The Mansfield® limited lifetime warranty on china;
One-year limited warranty on tank trim
- Available in White

MODEL 710	 ELONGATED	 SMARTHEIGHT ADA	 CTK
Toilet seat included			
Complete toilet kit			

COMPONENTS


MODEL #	DESCRIPTION	CODES/STANDARDS
710CTK (071010017)	Elongated front, SmartHeight complete toilet kit. Includes: slow close toilet seat, wax toilet ring, floor bolts, bolt alcove cover plates, and installation instructions. Water supply hardware not included.	<div> HIGH EFFICIENCY TOILET</div> <div> C</div> <div> Meets EPA Criteria Labeled Dupont Rat</div> <div> ADA COMPLIANT</div>
710A	Tank and cover only, with left hand, side-mount, chrome-plated, metal trip lever. Less supply.	
710B	Elongated front, SmartHeight toilet bowl.	
SB710	Slow close seat	
TANK TRIM & REPLACEMENT PARTS		
71	Trip lever - chrome, side mount, left hand	
207	3" flapper fush valve	
90	Anti-siphon pilot fill valve	
710-LID	Tank lid	

710CTK (071010017) BROADWAY



Elongated SmartHeight, Vitreous China, Two-Piece Complete Toilet Kit

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
710CTK (071010017)	Elongated SmartHeight (1.28 gpf / 4.8 lpf) two-piece toilet kit	   

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3" flapper flush valve
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	9" X 7"
ROUGH-IN	12"
MaP RATING	1000 grams

TRAP DIAMETER	2"
TRAP SEAL	2-7/16"
SHIPPING WEIGHT	Model 710CTK- 116 lbs. (53 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

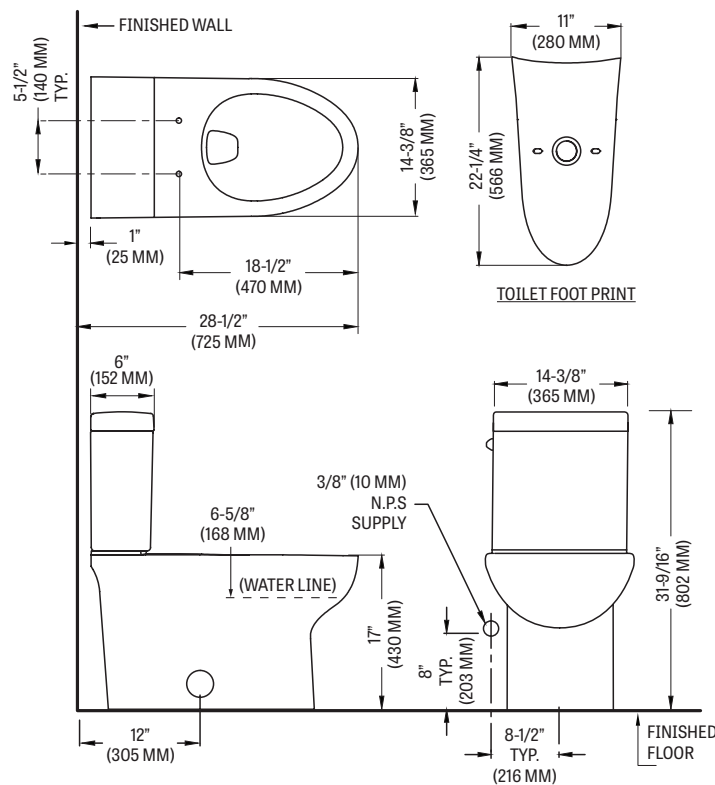

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.