

1319 ADRIATIC™



Elongated Front, SmartHeight™ Flush Valve Toilet

FEATURES




- Perfect for clinical applications
- 1.28* or 1.6 gpf low water consumption (*when using the proper 1.28 flushometer)
- High performance, high efficiency (HET)
- Elongated front, SmartHeight™ bowl
- ADA compliant
- 1-1/2" top spud provided to accommodate many brands of flush valves
- 10" rough-in
- 1-7/8" glazed trapway
- The Mansfield® limited lifetime warranty
- Available in White



MODEL 1319
Toilet seat not included



COMPONENTS




MODEL #	DESCRIPTION	CODES/STANDARDS
1319	Elongated front, SmartHeight™, toilet bowl. Includes a 1-1/2" top spud. Less toilet seat, flush valve and supply.	   <p>HIGH EFFICIENCY TOILET C ADA COMPLIANT</p>

1319 ADRIATIC™



Elongated Front, SmartHeight™ Flush Valve Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
1319	Elongated front, SmartHeight™, floor mount, flush valve toilet	  

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	Siphon jet technology
WATER USAGE	1.28 or 1.6 gpf / 4.86 or 6.05 lpf
WATER SURFACE AREA	8' X 10'
ROUGH-IN	10"
MAP RATING	1,000 grams

TRAP DIAMETER	1-7/8"
TRAP SEAL	2-1/4"
SHIPPING WEIGHT	Model 1319 - 51 lbs. (23 kg)
WARRANTY	Vitreous China - Limited Lifetime

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

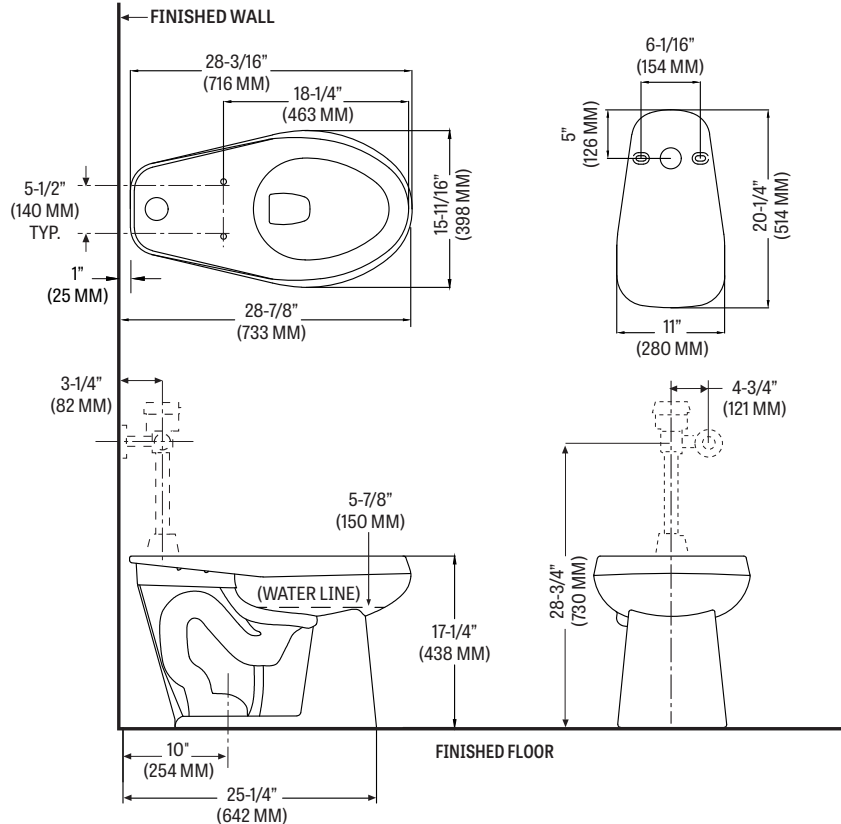

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.