5135CTK **PRO-FIT® 1.28**

MANSFIELD LOWE'S



Complete Toilet Kit, Elongated Front, Vitreous China, Two-Piece Toilet

FEATURES

- 3-bolt SmartFasten[™] tank-to-bowl connection
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- Uses 20% less water than conventional toilets
- · Elongated front bowl
- · 3-2" hybrid flapper flush valve
- · Fluidmaster® anti-siphon pilot fill valve
- 12" rough-in
- · Model 31 color-match, plastic trip lever
- · 2" glazed trapway
- · The Mansfield® Limited Lifetime Warranty
- · Available in White



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
5135CTK	Elongated front, two-piece toilet			
135	Elongated front, toilet bowl only. Less toilet seat. Specify color.			
3173	Tank and cover only with left hand, front-mount, color-match, plastic trip lever. Fluidmaster® fill valve. Less supply. Specify color.	HIGH EFFICIENCY TOULET		
SB200	Elongated front, plastic toilet seat and cover.			
TANK TRIM & REPLACEMENT PARTS				
31	Trip lever – color-match, plastic trip lever, left hand			
228	3-2" Hybrid flapper flush valve			
400A	Fluidmaster® anti-siphon pilot fill valve			
2206	Anti-siphon pilot fill valve (compatible replacement)			
630-0207	3" Replacement flapper kit			
160-LID	Tank lid			



5135CTK **PRO-FIT® 1.28**

MANSFIELD LOWE'S



Complete Toilet Kit, Elongated Front, Vitreous China, Two-Piece Toilet

SPECIFICATIONS

MODEL #	DESCRIPTION	CODES/STANDARDS
5135CTK	Elongated front (1.28 gpf / 4.8 lpf) two-piece toilet	HIGH EFFICIENCY TOULET C C C C C C C C C C C C C

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3-2" Hybrid flapper flush valve
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	9" X 10"
ROUGH-IN	12"
MAP RATING	800 grams


TRAP DIAMETER	2"
TRAP SEAL	2-1/2"
SHIPPING WEIGHT	Model 5135CTK - 88 lbs. (40 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TANK OPTIONS

Standard 1.28 gpf configuration: 3-2" hybrid flapper flush valve, Fluidmaster® 3173 anti-siphon pilot fill valve, left hand, colormatch trip lever. Variation of model 3173, with right hand, 3173RH color-match trip lever. 3165 Variation of model 3173, with cover lock. 3174 Variation of model 3173, with tank liner. Variation of model 3173, with left hand, 3120 chrome trip lever. 3125 Variation of model 3173, 14" rough-in.

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

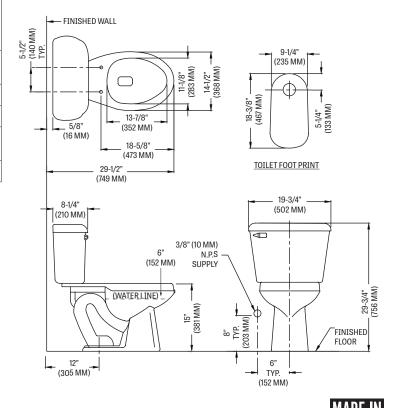



Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.