

4130LTCTK PRO-FIT[®] 1 - 1.28



Complete Toilet Kit, Round Front, Vitreous China, Two-Piece Toilet

FEATURES

- Complete toilet kit (CTK)
- 3-bolt SmartFaster™ tank-to-bowl connection
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- Uses 20% less water than conventional toilets
- Round front bowl
- 3-2" hybrid flapper flush valve
- Fluidmaster® anti-siphon pilot fill valve
- 12" rough-in
- Lined tank for reduced condensation
- Model 31 color-match, plastic trip lever
- 2' glazed trapway
- The Mansfield® Limited Lifetime Warranty
- Available in White



MODEL 4130LTCTK

Toilet seat included

Complete toilet kit



ROUND



CTK

COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS
4130LTCTK	Round front, two-piece toilet kit. Includes: toilet seat, wax toilet ring, floor bolts, caps, and multi-lingual installation instructions. Water supply hardware not included.	 
130	Round front, toilet bowl only. Less toilet seat.	
3174	Tank and cover only with left hand, front-mount, color-match, plastic trip lever. Tank liner and Fluidmaster® anti-siphon pilot fill valve. Less supply.	
SB100	Round, closed front, plastic toilet seat and cover.	
TANK TRIM & REPLACEMENT PARTS		
31	Trip lever - color-match, plastic trip lever, left hand	
228	3-2" Hybrid flapper flush valve	
400A	Fluidmaster® anti-siphon pilot fill valve	
2206	Anti-siphon pilot fill valve (compatible replacement)	
630-0207	3" Replacement flapper kit	
160-LID	Tank lid	



4130LTCTK PRO-FIT[®] 1 - 1.28



Complete Toilet Kit, Round Front, Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
4130LTCTK	Round front (1.28 gpf / 4.8 lpf) two-piece toilet kit.	 

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3-2" Hybrid flapper flush valve
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	8' X 9'
ROUGH-IN	12'
MAP RATING	800 grams

TRAP DIAMETER	2'
TRAP SEAL	2-5/8'
SHIPPING WEIGHT	Model 4130LTCTK - 85 lbs. (38.2 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

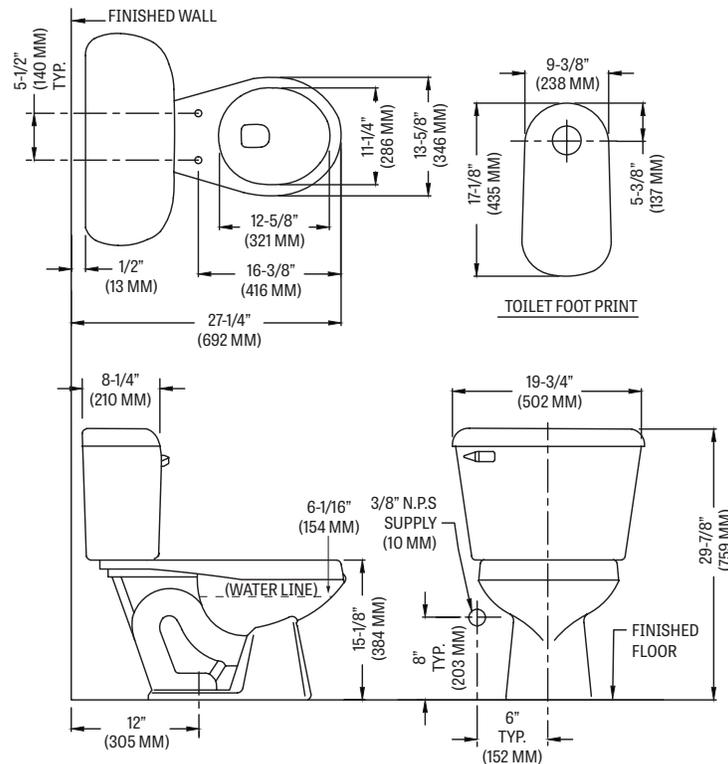

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.

