ITEM NO. 3488679 / MODEL NO. 5130CTK

MANSFIELD® | Lowe's



Round Front, Vitreous China, Two-Piece Toilet, Complete Toilet Kit

FEATURES

PRO-FIT®

- · Complete toilet kit (CTK)
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- · Universal style matches any decor
- · Round front bowl
- · 3-2' hybrid flapper flush valve
- · Fluidmaster® pilot operated anti-siphon fill valve
- 12' rough-in
- SmartFasten[™] 3-bolt tank-to-bowl connection
- · Model 31 color-match, plastic trip lever
- · 2' glazed trapway
- · The Mansfield® limited lifetime warranty on china, One-year limited warranty on tank trim
- · Available in White



Complete Toilet Kit

COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
5130CTK	Round front complete two-piece toilet kit. Includes: slow close toilet seat, tank and bowl, floor bolts, wax ring, caps and multi-lingual installation instructions. Water supply not included.			
130	Round front toilet bowl only.	UPO ASSESSOR		
3173	Tank and lid only. With left hand, front-mount, color-match plastic trip lever.	HIGH EFFICIENCY C ® GRAND CONTROL CONT		
SB100	Round, plastic toilet seat			
TANK TRIM & REPLACEMENT PARTS				
31	Trip Lever - color-match plastic trip lever, left hand			
400A	Fluidmaster® anti-siphon pilot fill valve			
228	3-2' Hybrid flapper flush valve			
2206	Anti-siphon pilot fill valve (compatible replacement)			
630-0207	3' Replacement flapper kit			
160-LID	Tank lid			



MANSFIELD TLOWE'S



PRO-FIT®

Round Front, Vitreous China, Two-Piece Toilet, Complete Toilet Kit

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
5130CTK	Round front (1.28 gpf/4.8 lpf) two-piece toilet kit	HIGH EFFICIENCY TOULET

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3-2' Hybrid flapper flush valve
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	8'X9'
ROUGH-IN	12'
MAP RATING	800 grams

TRAP DIAMETER	2'
TRAP SEAL	2-7/8'
SHIPPING WEIGHT	Model 5130CTK - 85 lbs. (38.5 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One-Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

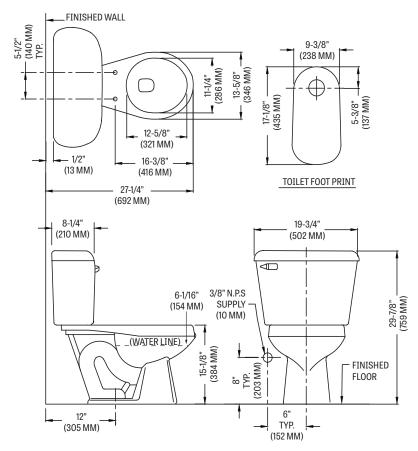



Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.