5318


MANSFIELD®


PLUMBING


ROUGH-IN

CENTER OVERFLOW

Barrett 72" x 42" x 24" Swirl-way[®] Air Massage Bath

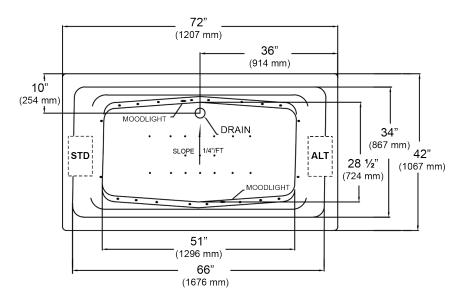



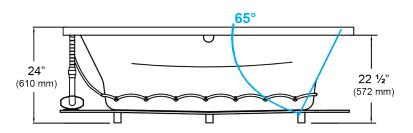

NOTES:

- Blower locations shown for clarity. Specify when ordering STD - Standard or ALT - Alternate.
- 2. Required blower motor access is 20" W x 15" H.
- 3. Measurements may vary 1/4" (+/-)
- 4. If a factory installed nailing flange is added to a unit, add 1/8" to each side flanged.
- 5. Removable apron is not available for this unit.
- 6. These dimensions are nominal and subject to change without notice.

SPECIFICATIONS			
Specification	Description	Specification	Description
Material	Acrylic, fiberglass reinforced	Number of Jets	34
Construction	Self-contained, pre-plumbed air bath system mounted on a pre-leveled base	Water Capacity	80 gal. (min) 95 gal. (max)
Blower Motor	1.0 HP Variable Speed - 120 V, 9.0 AMP	Floor Loading Weight	47 lbs. / sq. ft (229 kg/m ²)
Electrical Requirements	One 120V, 20 AMP, GFCI Protected Circuit	Shipping Weight	180 lbs.
On/Off Control	Six button electronic control 20 minute time cycle, and auto purge cycle	Warranty	Limited Ten Year







