

1319 ADRIATIC™



Elongated Front, SmartHeight™ Flush Valve Toilet, 1.1 to 1.6 gpf water consumption

FEATURES




- Designed for commercial and industrial applications
- Water consumption ranges from 1.1 to 1.6 gallons per flush, depending on the flush valve used
- High performance, high efficiency (HET) when using the proper flushometer
- Elongated front, SmartHeight™ bowl
- ADA compliant
- 1-1/2" top spud provided to accommodate many brands of flush valves
- 10" rough-in
- 1-7/8" glazed trapway
- The Mansfield® limited lifetime warranty
- Available in White



MODEL 1319
Toilet seat not included



COMPONENTS




MODEL #	DESCRIPTION	CODES/STANDARDS
1319	Elongated front, SmartHeight™, toilet bowl. Includes a 1-1/2" top spud. Less toilet seat, flush valve and supply.	   <p>HIGH EFFICIENCY TOILET C ADA COMPLIANT</p>

1319 ADRIATIC™



Elongated Front, SmartHeight™ Flush Valve Toilet, 1.1 to 1.6 gpf water consumption

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
1319	Elongated front, SmartHeight™, floor mount, flush valve toilet, 1.1 to 1.6 gallons per flush	  

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	Siphon jet technology
WATER USAGE	1.28 to 1.1 gallons per flush
WATER SURFACE AREA	8' X 10'
ROUGH-IN	10"
MAP RATING	1,000 grams

TRAP DIAMETER	1-7/8"
TRAP SEAL	2-1/4"
SHIPPING WEIGHT	Model 1319 - 51 lbs. (23 kg)
WARRANTY	Vitreous China - Limited Lifetime

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

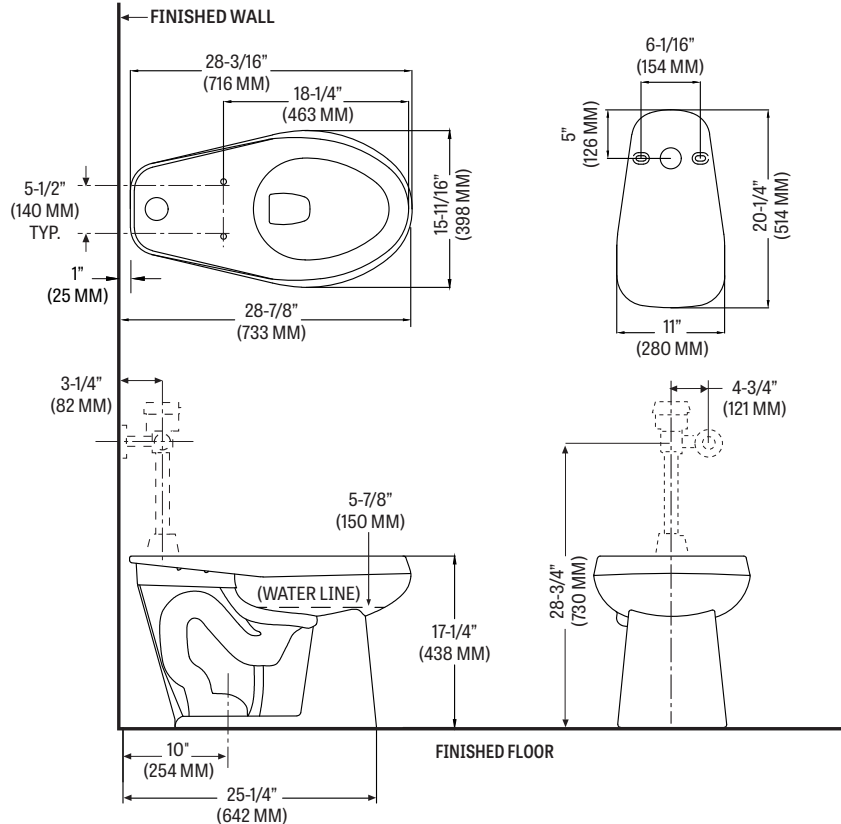

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.