

# 144-155 QUANTUM® 1.28

**MANSFIELD®**

Elongated Front, ADA\*, Pressure-Assist, Rear Outlet, Wall-Mount, Vitreous China Two-Piece Toilet




## FEATURES

- High performance pressure-assist, high efficiency toilet (HET)
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- Uses 20% less water than conventional toilets
- Elongated rear outlet, wall-mount
- Model 45 chrome-plated metal trip lever
- 2' glazed trapway
- The Mansfield® limited lifetime warranty on china, Flushmate ten-year limited warranty on vessel
- Available in White
- 1000 gr MaP

\*Meets ADA height requirement when installed with a regular toilet seat



## COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS
<b>144-155</b> (144010000-155010000)	Elongated front, ADA*, rear outlet, wall-mount pressure-assist, two-piece toilet.	<div> HIGH EFFICIENCY TOILET</div> <div> C</div> <div> ADA COMPLIANT</div>
<b>144</b> (144010000)	Elongated front, ADA*, rear outlet, wall-mount toilet bowl only. Toilet seat not included.	
<b>155</b> (155010000)	Pressure-assist tank and cover only with left hand chrome-plated, metal trip lever. Supply not included.	
<b>TANK OPTIONS</b>		
<b>155RH</b>	Pressure-assist tank and cover only with right hand chrome-plated, metal trip lever. Less supply. Specify color.	
<b>TANK TRIM &amp; REPLACEMENT PARTS</b>		
<b>45</b>	Trip lever - chrome-plated, metal trip lever, left hand	
<b>125-LID</b>	Tank lid	
<b>FLUSHMATE® 503</b>	Pressure-assist flushing system. Separate warranty applies. Contact FLUSHMATE® at 1-800-533-3460.	




When properly installed, this product meets the requirements for the Americans with Disabilities Act of 1990 (ADA).  
Refer to local plumbing codes, as they may vary by location and application.

# 144-155 QUANTUM® 1.28

**MANSFIELD®**

Elongated Front, ADA\*, Pressure-Assist, Rear Outlet, Wall-Mount, Vitreous China Two-Piece Toilet

## SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
144-155	Elongated front, rear outlet, wall-mount (1.28 gpf / 4.8 lpf) two-piece toilet	  

MATERIAL	Vitreous China
WATER PRESSURE RANGE	35 to 80 PSI
FLUSH SYSTEM	Flushmate™ flushing technology
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	9-3/4" X 8"
ROUGH-IN	Rear outlet, wall mount
MAP RATING	1000 grams

TRAP DIAMETER	2"
TRAP SEAL	2-1/8"
SHIPPING WEIGHT	Model 144 - 61 lbs. (27.6 kg) Model 155 - 41 lbs. (18.5 kg)
WARRANTY	Vitreous China - Limited Lifetime Vessel - Limited Ten Year (Flushmate)

## TECHNICAL INFORMATION

**Note:** these dimensions are nominal and subject to change without notice.

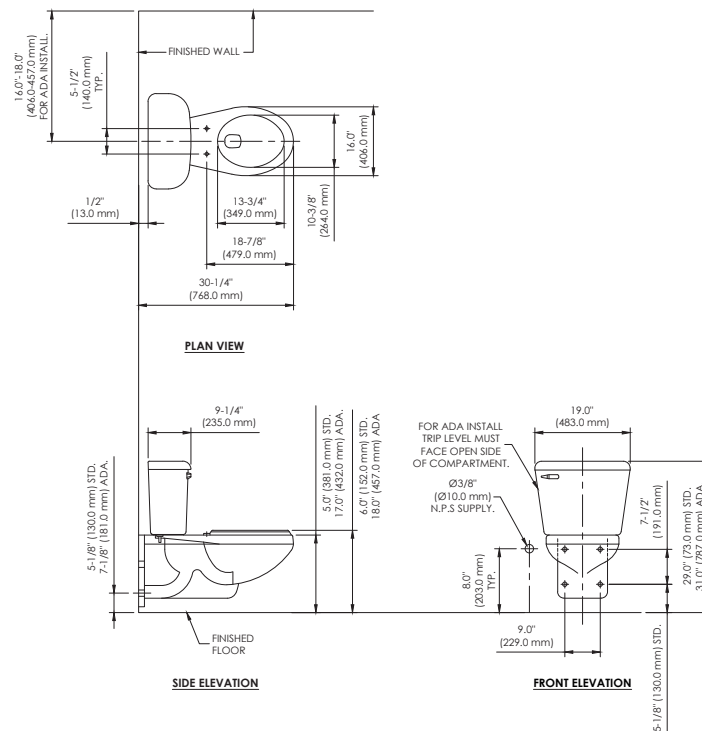

\* TOILET SEAT NOT INCLUDED. DIMENSIONS HERE REPRESENT AN STANDARD TOILET SEAT.

When properly installed, this product meets the requirements for the Americans with Disabilities Act of 1990 (ADA).

Refer to local plumbing codes, as they may vary by location and application.

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.