4817-3816RH **CASCADE**°

MANSFIELD®

Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet

FEATURES

- Uses 20% less water than conventional toilets
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- Unique rimless, elongated front, SmartHeight[™] bowl
- · 3' flush valve
- · Pilot operated anti-siphon fill valve
- 12' rough-in
- · Model 58RH chrome-plated, plastic trip lever
- · 2' glazed trapway
- The Mansfield® limited lifetime warranty
- · Available in White



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS	
4817-3816	Elongated front, SmartHeight™, two-piece toilet. Less toilet seat and supply.		
4817	Elongated front, SmartHeight [™] toilet bowl only. Less toilet seat and supply.	HIGH EFFICIENCY C B ADAPT LINET LINE	
3816RH	Tank and cover only, with right hand, front-mount, chrome trip lever. Less supply.	TOLLET ADA COMPLIANT LEMENTET	
TANK TRIM & REPLACEMENT PARTS			
58RH	Trip lever - chrome-plated, plastic trip lever, right hand		
2206	Pilot operated fill valve		
216	3' flapper flush valve		
3816-LID	Tank lid		

4817-3816RH **CASCADE**°

MANSFIELD®

Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
4817-3816RH	Elongated front, SmartHeight™ (1.28 gpf/4.8 lpf) two-piece toilet	HIGH EFFICIENCY COMPLIANT ADA COMPLIANT

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3' flapper
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	7-1/4' X 10-1/2'
ROUGH-IN	12'
MAP RATING	800 grams

TRAP DIAMETER	2'
TRAP SEAL	2'
SHIPPING WEIGHT	Model 4817- 45 lbs. (20 kg) Model 3816RH- 31 lbs. (14 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

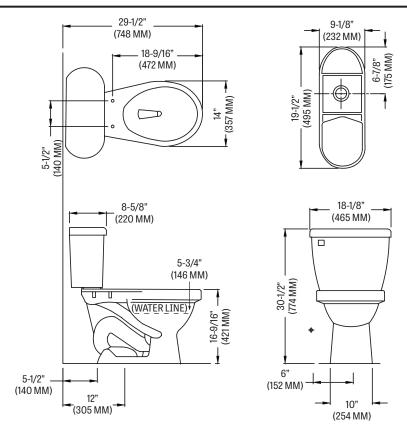

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.