384-386 SUMMIT®

Elongated Front, SmartHeight™, Vitreous China, Two-Piece Toilet

FEATURES

- High performance MagnaFlush™ flushing technology
- 1.6 gpf / 6.0 lpf low water consumption
- Elongated front, SmartHeight[™] bowl (ADA compliant)
- SmartFasten[™] 3-bolt tank-to-bowl connection
- 3" Rigid Flapper flush valve requires less force to flush, is more consistent and uses a simple universal repair part/seal
- Fluidmaster® pilot operated anti-siphon fill valve
- 12" rough-in
- Model 57 chrome-plated, metal trip lever
- 2" glazed trapway
- The Mansfield® limited lifetime warranty on china; Five-year limited warranty on tank trim
- Available in White, Biscuit and Bone



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS	
384-386	Elongated front, SmartHeight™, two-piece toilet. Less toilet seat and supply. Specify color.		
384	Elongated front, SmartHeight™ toilet bowl only. Less supply. Specify color.		
386	Tank and cover only, with left hand, front-mount, chrome-plated, metal trip lever. Less supply. Specify color.	- ADA COMPLIANT	
TANK TRIM & R	EPLACEMENT PARTS		
57	Trip lever - chrome-plated, metal trip lever, left hand		
2037-1212	Summit® 1.6 rigid flapper flush valve		
400A	Fluidmaster® anti-siphon pilot fill valve		
2206	Anti-siphon pilot fill valve (compatible replacement)		
630-0030	Replacement flush valve seal		
386-LID	Tank lid		

384-386 **SUMMIT**®

Elongated Front, SmartHeight[™], Vitreous China, Two-Piece Toilet

SPECIFICATIONS

TANK OPTIONS

lever.

386RH

386LT


MODEL #	DESCRIPTION	CODES/STANDARDS
384-386	Elongated front, SmartHeight™ (1.6 gpf/6.0 lpf) two-piece toilet	

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	MagnaFlush™ flushing technology
WATER USAGE	1.6 gpf / 6.0 lpf
WATER SURFACE AREA	9" X 10"
ROUGH-IN	12"
MAP RATING	1,000 grams

TRAP DIAMETER	2"
TRAP SEAL	2-3/8"
SHIPPING WEIGHT	Model 384 - 54 lbs. (24.4 kg) Model 386 - 36 lbs. (16.3 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited Five Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

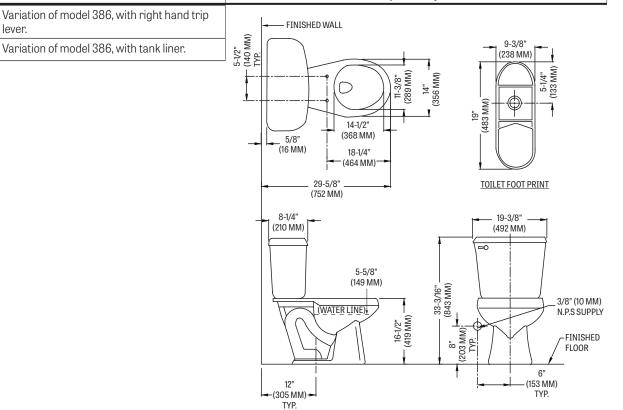

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.