380-386 **SUMMIT**®

MANSFIELD®

Round Front, Vitreous China, Two-Piece Toilet

FEATURES

- High performance MagnaFlush™ flushing technology
- SmartFasten™ 3-bolt tank-to-bowl connection
- 1.6 gpf / 6.0 lpf low water consumption
- · Round front bowl
- · PuraClean® easy-to-clean glaze
- Fluidmaster® pilot operated anti-siphon fill valve
- 3' Rigid Flapper flush valve requires less force to flush, is more consistent and uses a simple universal repair part/seal
- · Model 57 chrome-plated, metal trip lever
- 12' rough-in
- · 2' glazed trapway
- The Mansfield® limited lifetime warranty on china; Five-year limited warranty on tank trim
- · Available in White, Biscuit and Bone



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
380-386	Round front, two-piece toilet. Less toilet seat and supply. Specify color.			
380	Round front toilet bowl only. Less toilet seat. Specify color.			
386	Tank and cover only, with left hand, front-mount, chrome-plated, metal trip lever. Less supply. Specify color.			
TANK TRIM & REPLACEMENT PARTS				
57	Trip lever - chrome-plated, metal trip lever, left hand			
2037-1212	Summit® 1.6 rigid flapper flush valve			
400A	Fluidmaster® anti-siphon pilot fill valve			
2206	Anti-siphon pilot fill valve (compatible replacement)			
630-0030	Replacement flush valve seal			
386-LID	Tank lid			



380-386 **SUMMIT**®

MANSFIELD®

Round Front, Vitreous China, Two-Piece Toilet

SPECIFICATIONS

MODEL #	DESCRIPTION	CODES/STANDARDS
380-386	Round front, (1.6 gpf/6.0 lpf) two-piece toilet	C ®

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	MagnaFlush™ flushing technology
WATER USAGE	1.6 gpf / 6.0 lpf
WATER SURFACE AREA	8' X 9'
ROUGH-IN	12'
MAP RATING	1,000 grams


TRAP DIAMETER	2'
TRAP SEAL	2-3/8'
SHIPPING WEIGHT	Model 380 - 49 lbs. (22.2 kg) Model 386 - 36 lbs. (16.3 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited Five Year

TANK OPTIONS

386RH	Variation of model 386, with right hand trip lever.
386LT	Variation of model 386, with tank liner.

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

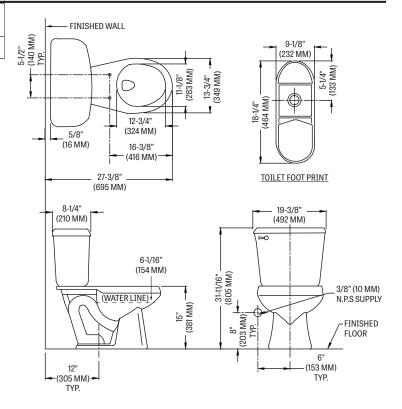



 $Fixture\ performance\ and\ specifications\ meet\ or\ exceed\ ASME\ A112.19.2/CSA\ B45.1\ standards, and\ other\ state\ and\ local\ codes.$