

4817-3816 CASCADE®

MANSFIELD®

Elongated Front, ADA*, SmartHeight, Vitreous China, Two-Piece Toilet

FEATURES

- Uses 20% less water than conventional toilets
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- Unique rimless, elongated front, SmartHeight™ bowl
- 3" flush valve
- Pilot operated anti-siphon fill valve
- 12" rough-in
- Model 58 chrome-plated, plastic trip lever
- 2" glazed trapway
- The Mansfield® limited lifetime warranty
- Available in White

*Meets ADA height requirement when installed with a regular toilet seat



MODEL 4817-3816

Toilet seat not included






ELONGATED



SMARTHEIGHT ADA

COMPONENTS





MODEL #	DESCRIPTION	CODES/STANDARDS	
4817-3816 (481710000-381610000)	Elongated front ADA*, SmartHeight two-piece toilet.	 HIGH EFFICIENCY TOILET	
4817 (481710000)	Elongated front, ADA*, SmartHeight toilet bowl only. Toilet seat not included.		 C
3816 (381610000)	Tank and cover only, with left hand, front-mount, chrome trip lever. Supply not included.		 ADA COMPLIANT
TANK TRIM & REPLACEMENT PARTS			
58	Trip lever - chrome-plated, plastic trip lever, left hand		
2206	Pilot operated fill valve		
216	3' flapper flush valve		
3816-LID	Tank lid		

4817-3816 CASCADE®

MANSFIELD®

Elongated Front, ADA*, SmartHeight, Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
4817-3816	Elongated front, SmartHeight (1.28 gpf/4.8 lpf) two-piece toilet	   

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3" flapper
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	7-1/4" X 10-1/2"
ROUGH-IN	12"
MAP RATING	800 grams

TRAP DIAMETER	2"
TRAP SEAL	2"
SHIPPING WEIGHT	Model 4817- 45 lbs. (20 kg) Model 3816- 31 lbs. (14 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

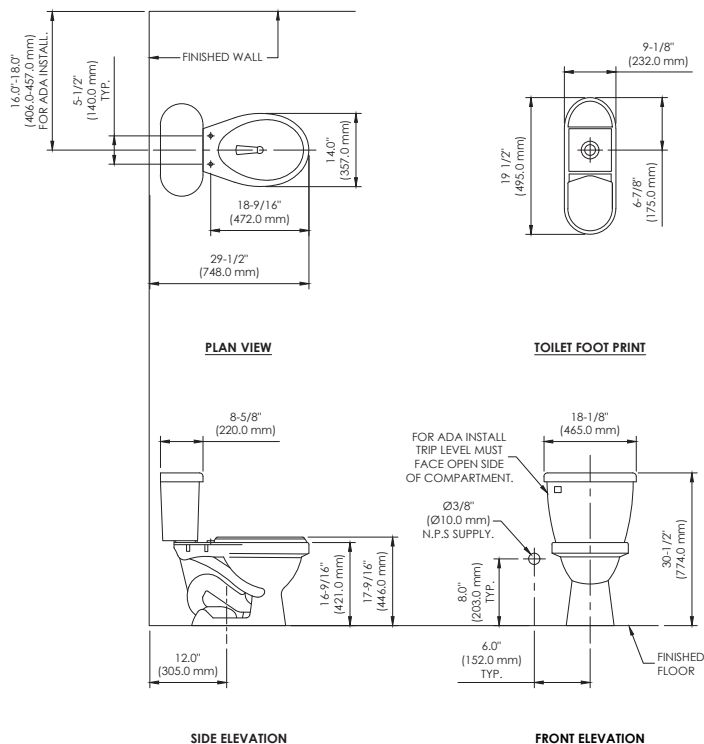

* TOILET SEAT NOT INCLUDED, DIMENSIONS HERE REPRESENT AN STANDARD TOILET SEAT.

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.