ITEM NO. 3781156 / MODEL NO. 5008550000

BARRETT™ 3666

MANSFIELD® LOWE'S



66" x 36" x 24", Acrylic, Swirl-Way® Whirlpool

FEATURES

- · High gloss, easy-to-clean acrylic with fiberglass reinforcement
- Whirlpool hydromassage system uses fully controllable, high-pressure back and body jets for complete muscle relief
- · Clean geometric lines
- · Hydro-V back jet system with back and body jets
- · All jets are directionally and flow adjustable
- · Includes two pillows
- · Rectangular model with center drain
- · Pre-leveled legs for easy installation
- · Integrated dual armrests for bather's comfort
- · Dual back jets
- · Spacious bathing well designed for two-person comfort
- · Installation: Drop-In, Alcove or Undermount
- · 10-year limited warranty on acrylic
- · Available in White



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS
5008550000	66' x 36' x 24' Rectangular Swirl-Way® Whirlpool. Drain not included.	UPC B USPC LAPMO
ACCESSORIES		
CAB-	Cable Overflow Drain (White — 1330, Chrome — 1335, Everbrass — 1336, Brushed Nickel — 1337, Oil Rubbed Bronze — 1338, Matte Black — 1339)	
TIP-	Tip Toe Overflow Drain (Chrome — 1335, Everbrass — 1336, Brushed Nickel — 1337, Oil Rubbed Bronze — 1338, Matte Black — 1339)	
SWAPOO	Nailing Flange Kit (includes 14' PVC nailing flange, tacky tape and installation instructions)	



MANSFIELD® LOWE'S



BARRETT™ 3666

66" x 36" x 24", Acrylic, Swirl-Way® Whirlpool


SPECIFICATIONS


MATERIAL	Acrylic, fiberglass reinforced
CONSTRUCTION	Self contained, pre-plumbed whirlpool bath system mounted on pre-leveled base.
ELECTRICAL REQUIREMENTS	One 120 volt, 20 amp GFCI dedicated circuit. Optional heater: separate 120 volt, 20 amp dedicated circuit.

SOAKING DEPTH	18-1/2'
NUMBER OF JETS	16
WATER CAPACITY	60 gal. (min.) / 70 gal. (max)
FLOOR LOADING WEIGHT	47 lbs. sq.ft.
SHIPPING WEIGHT	Model 5008550000 - 170 lbs. (77 kg)
WHIRLPOOL PUMP	9 amp
WARRANTY	Acrylic - 10-Year


TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

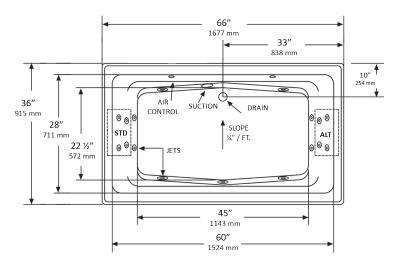







NOTES:

- Pump locations shown for clarity. Specify when ordering STD Standard or ALT Alternate.
- 2. Required pump motor access is 20" W x 15" H.
- 3. Measurements may vary 1/4" (+/-)
- 4. If a factory installed nailing flange is added to a unit, add 1/8" to each side flanged.
- 5. Removable apron is not available for this unit.
- 6. These dimensions are nominal and subject to change without notice.

