

Project: _____

Fixture Type: _____

Location: _____

Contact: _____

P2556-31M30K

Trevina

52-inch 3-blade ceiling fan includes an LED light source, offering both form and function with energy- and cost-savings benefits. A white opal shatterproof shade contains an integrated 17W dimmable 3000K LED module. The fan housing is coated in a Matte Black finish with reversible Matte Black/Distressed Ebony blades. Easily control the fan with the included wall switch.

Category: Ceiling Fans

Finish: Matte Black (Painted)

Construction: Steel construction

Glass/Shade: Etched Opal glass bowl

Location Rating: Dry



DIMENSIONS

Diameter: 52"

Height: 15.75

Glass


Width: 9.01875"

Height: 2.0875"

FEATURES

- 52" Trevina ceiling fan features an LED light source, offering both form and function with energy and cost-savings benefits
- The light kit contains a etched opal glass shade and is comprised of a 17W dimmable 3000K LED module, offering 1400 lumens (source), 90+ CRI
- Trevina fan features three, reversible blades in a Matte black finish
- Indoor ceiling fan ideal for use in great rooms, living rooms, bedrooms and bonus rooms
- Features Modern and Transitional design styling
- Ceiling mounting on downrod
- Includes easy to assemble canopy system that can be installed on vaulted ceilings up to 30° slope
- As a general rule of thumb, lighting experts suggest this fan is ideal in a room size that ranges from 226- to 400-square feet
- Includes a wall control switch
- Three speed control, manual reverse control
- Trevina ceiling fan adds form and function - by providing increased air circulation in rooms
- A 3/4" x 4-1/2" downrod is included. Longer accessory downrods can be ordered separately
- Can be used to comply with California Title 20.

- High Speed Energy Information: Airflow- 4742 cfm, Energy consumption- 64 watts (excluding lights), Airflow efficiency 74 cfm/watt
- Limited lifetime warranty
- Dimmable to 10% brightness
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting plate for outlet box included
- 80" of wire supplied
- Meets California Title 24 JA8-2016

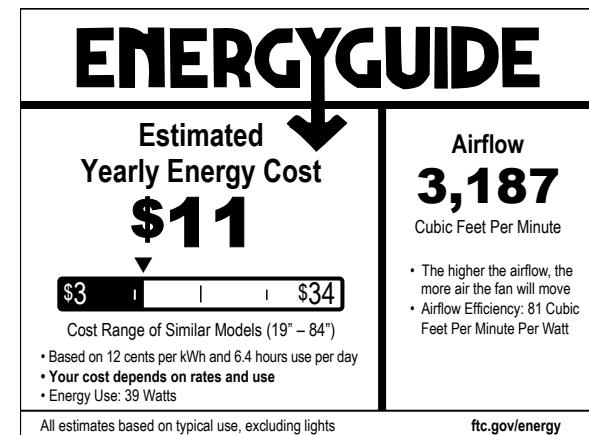

PERFORMANCE

Number of Modules	1
Input Power	17W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW	1400/82 (LM-82)
CCT	3000 K
CRI	CRI 90 CRI
Life (hours)	50,000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Min. Start Temp	-10 °C
Max. Operating Temp	30 °C
Warranty	Limited Lifetime warranty
Labels	ULus Dry location listed Meets California Title 24 JA8-2016