138-175

MANSFIELD®

Elongated Front, Vitreous China, Two-Piece Toilet

FEATURES

- · 3-bolt SmartFasten™ tank-to-bowl connection
- 1.6 gpf / 6.0 lpf low water consumption
- · Elongated front bowl
- 2" flush tower
- · Fluidmaster® anti-siphon pilot fill valve
- · Cover lock tank lid
- · Lined tank for reduced condensation
- 10" rough-in
- · Model 40 chrome-plated, plastic trip lever
- · 2" glazed trapway
- The Mansfield® limited lifetime warranty
- · Available in White



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
138-175	Elongated front, two-piece toilet.			
138	Elongated front, toilet bowl only. Less toilet seat. Specify color.	Up		
175	Tank and cover only, with left hand, front-mount, chrome-plated, plastic trip lever. Fluidmaster® anti-siphon pilot fill valve. Cover lock and tank liner. Less supply.	c ®		
TANK TRIM & REPLACEMENT PARTS				
40	Trip lever - chrome-plated, plastic trip lever, left hand			
211-1112	Flush tower			
400A	Fluidmaster® anti-siphon pilot fill valve			
630-0030	Replacement flush valve seal			
165-LID	Tank lid (cover lock)			
Part # 001238891	Locking hardware for cover lock tanks			

138-175

ALTO®

MANSFIELD®

Elongated Front, Vitreous China, Two-Piece Toilet

SPECIFICATIONS

MODEL #	DESCRIPTION	CODES/STANDARDS
138-175	Elongated front (1.6 gpf / 6.0 lpf) two-piece toilet	C ®


TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	2" Flush Tower
WATER USAGE	1.6 gpf / 6.0 lpf
WATER SURFACE AREA	9" X 10"
ROUGH-IN	10"
MAP RATING	800 grams

TRAP DIAMETER	2"
TRAP SEAL	2-1/2"
SHIPPING WEIGHT	Model 138 - 49 lbs. (22.2 kg) Model 175 - 34 lbs. (15.4 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TANK OPTIONS Standard 1.6 gpf configuration: 160 2" flush tower, Fluidmaster® anti-siphon pilot fill valve, left hand, chrome trip lever. **160RH** Variation of model 160, with right hand trip lever. Variation of model 160, with cover lock. 165 170 Variation of model 160, with tank liner. Variation of model 160, with 2" flapper flush valve 172 and chrome trip lever. Variation of model 160, with 2" flapper flush valve and 173 color-match trip lever. 173RH Variation of model 173, with right hand trip lever. Variation of model 173, with tank liner. 174 Variation of model 160, with cover lock and tank 175 Variation of model 160, with color-match trip lever. 180 Variation of model 160, with color-match trip lever 190 and tank liner.

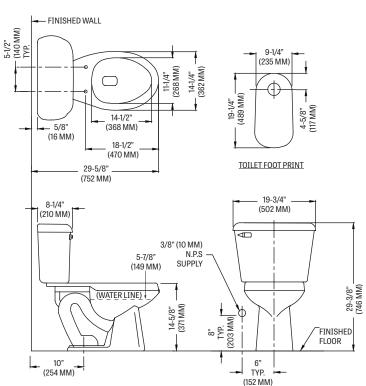

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.