


## 5058/5558 Heathrow™ 72" x 42" x 23" Swirl-way<sup>®</sup> Whirlpool and Bathtub


## **MANSFIELD®**

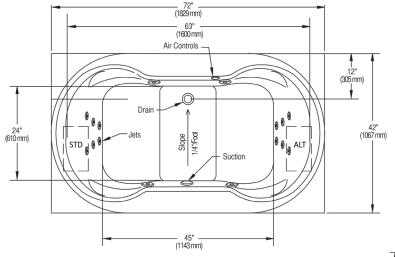

## PLUMBING ROUGH-IN



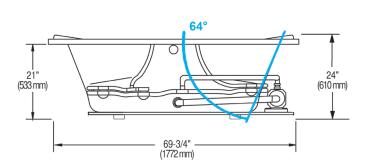



## NOTES:

- 1. Pump locations are shown for clarity.
- 2. Required pump motor access is 20" W x 15" H.
- 3. Measurements may vary 1/4" (+/-)
- 4. If a factory installed nailing flange is added to a unit, add  $1/8^{\prime\prime}$  to each side flanged.
- 5. Removable apron is not available for this unit.
- 6. These dimensions are nominal and subject to change without notice.

SPECIFICATIONS			
Specification	Description	Specification	Description
Material	Acrylic, fiberglass reinforced	Warranty	Limited Ten Year
Construction	Self-contained, pre-plumbed whirlpool bath system mounted on a pre-leveled base	Water Capacity	60 gal. (min) 72 gal. (max)
Number of Jets	14	Shipping Weight	Whirlpool - 175 lbs
Floor Loading Weight	47 lbs. / sq.ft.		Bathtub - 155 lbs
ESSENTIALS PACKAGE		COMFORT PACKAGE	
Pump Motor	Single speed induction pump, 9 AMP	Pump Motor	Variable speed induction pump, 9 AMP
On/Off Control	One button on/off electronic keypad	On/Off Control	Multi-function electronic keypad
Electrical Requirements	One 120V, 20 amp GFCl dedicated circuit. Optional heater: separate 120 V, 20 amp dedicated circuit.	Electrical Requirements	Two separate 120 V, 20 amp dedicated circuits







