
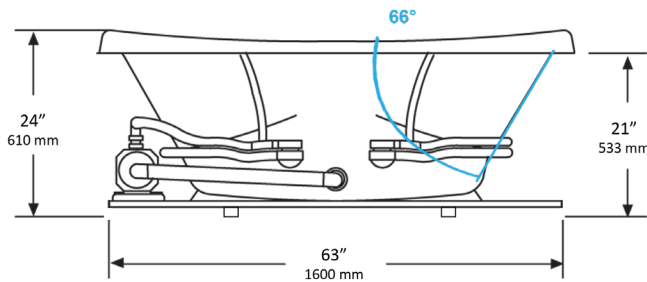
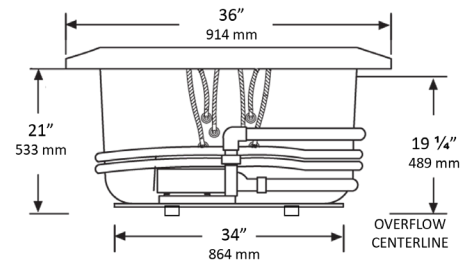



5027/5527

Essence™ 3666 66" x 36" x 24"  
Swirl-way® Whirlpool and Bathtub

**MANSFIELD®**

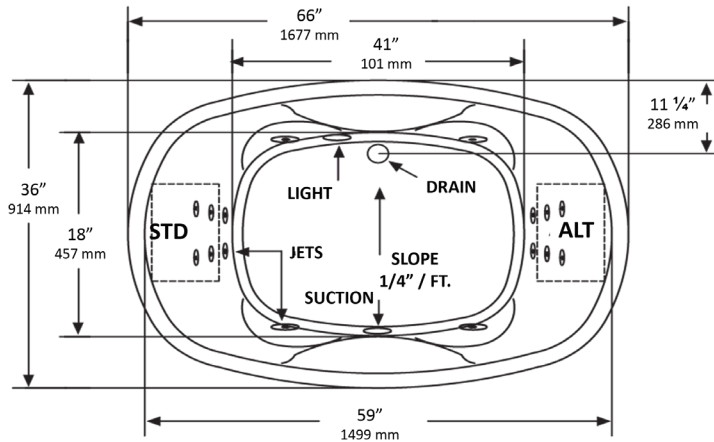

- NOTES:**
1. Pump locations shown for clarity. Specify when ordering STD - Standard or ALT - Alternate.
  2. Required pump motor access is 20" W x 15" H.
  3. Measurements may vary 1/4" (+/-)
  4. Removable apron is not available for this unit.
  5. These dimensions are nominal and subject to change without notice.

**SPECIFICATIONS**

Specification	Description	Specification	Description
Material	Acrylic, fiberglass reinforced	Warranty	Limited Ten Year
Construction	Self-contained, pre-plumbed whirlpool bath system mounted on a pre-leveled base	Water Capacity	70 gal. (min) 85 gal. (max)
Number of Jets	16	Shipping Weight	Whirlpool - 170 lbs Bathtub - 145 lbs
Floor Loading Weight	47 lbs. / sq.ft.		
<b>ESSENTIALS PACKAGE</b>		<b>COMFORT PACKAGE</b>	
Pump Motor	Single speed induction pump, 9 AMP	Pump Motor	Variable speed induction pump, 9 AMP
On/Off Control	One button on/off electronic keypad	On/Off Control	Multi-function electronic keypad
Electrical Requirements	One 120V, 20 amp GFCI dedicated circuit. Optional heater: separate 120 V, 20 amp dedicated circuit.	Electrical Requirements	Two separate 120 V, 20 amp dedicated circuits

