710CTK **Broadway**™

MANSFIELD®

Elongated Front, ADA*, SmartHeight, Vitreous China, Two-Piece Toilet

FEATURES

- · Complete toilet kit (CTK)
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- · Elongated SmartHeight bowl
- · Skirted bowl design conceals trapway
- · 2-bolt standard tank-to-bowl connection
- · 3" flapper flush valve
- · Anti-siphon pilot fill valve
- 12" rough-in
- · Chrome trip lever
- · 2" glazed trapway
- The Mansfield® limited lifetime warranty on china; One-year limited warranty on tank trim
- Trip lever operating force 5 pounds or less
- · Available in White

*Meets ADA height requirement when installed with a regular toilet seat



Complete toilet kit

COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
710CTK (071010017)	Elongated front, ADA*, SmartHeight complete toilet kit. Includes: slow close toilet seat, wax toilet ring, floor bolts, bolt alcove cover plates, and installation instructions.			
710A (710A10000)	Tank and cover only, with left hand, side-mount, chrome- plated, metal trip lever. Supply not included.	HIGH EFFICIENCY HIGH EFFICIENCY ADA COMPLIANT		
710B (710B10000)	Elongated front, ADA*, SmartHeight toilet bowl.	TOILET ANA COMPLIANT		
SB710	Slow close seat			
TANK TRIM & REPLACEMENT PARTS				
71	Trip lever - chrome, side mount, left hand			
207	3" flapper fush valve			
90	Anti-siphon pilot fill valve			
710-LID	Tank lid			

710CTK BROADWAY

MANSFIELD®

Elongated Front, ADA*, SmartHeight, Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
710CTK (071010017)	Elongated SmartHeight (1.28 gpf / 4.8 lpf) two-piece toilet kit	HIGH EFFICIENCY TOULET ADA COMPLIANT

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3" flapper flush valve
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	9" X 7"
ROUGH-IN	12"
MAP RATING	1000 grams

TRAP DIAMETER	2"
TRAP SEAL	2-7/16"
SHIPPING WEIGHT	Model 710CTK- 116 lbs. (53 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

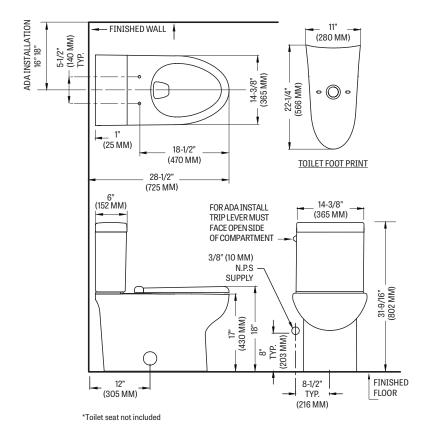

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.