1384CTK Protector°

MANSFIELD®

Elongated Front, SmartHeight™, No-Overflow, Vitreous China, Two-Piece Toilet

FEATURES

- · Complete toilet kit (CTK)
- · No-Overflow toilet
- · Secondary drain concealed within the bowl
- 1.6 gpf / 6.0 lpf low water consumption
- PuraClean® easy-to-clean glaze
- SmartFasten™ 3-bolt tank-to-bowl connection
- Oversized footprint
- Elongated front, SmartHeight[™] bowl
- · Pilot anti-siphon fill valve
- · 3' flush valve
- 12' rough-in
- Model 54 decorative metal trip lever
- · 2' glazed trapway
- The Mansfield® limited lifetime warranty
- · Available in White



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
1384CTK	Elongated front, SmartHeight™, two-piece toilet kit. Includes: toilet seat, wax toilet ring, floor bolts, caps, and multi-lingual installation instructions. Water supply hardware not included.			
1384	Elongated front, SmartHeight™ toilet bowl only. Less supply.	UPC E		
1386	Tank and cover only, with left hand, front-mount, chrome-plated, metal trip lever. Less supply.	C ® ADA COMPLIANT		
3800	Elongated, slow close toilet seat			
TANK TRIM & REPLACEMENT PARTS				
54	Trip lever - chrome-plated, metal trip lever, left hand			
206-1112	3' flapper flush valve			
2206	Pilot operated fill valve			
630-0207	3' Replacement flapper			
386-LID	Tank lid			



1384CTK PROTECTOR®

MANSFIELD®

Elongated Front, SmartHeight™, No-Overflow, Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
1384CTK	Elongated front, SmartHeight™ (1.6 gpf/6.0 lpf) two-piece toilet kit	C @ ADA COMPLIANT

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3' MagnaFlush™ flushing technology
WATER USAGE	1.6 gpf / 6.0 lpf
WATER SURFACE AREA	7-3/4' X 8-3/4'
ROUGH-IN	12'
MAP RATING	800 grams

TRAP DIAMETER	2'
TRAP SEAL	2'
SHIPPING WEIGHT	Model 1384CTK - 93 lbs. (42 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

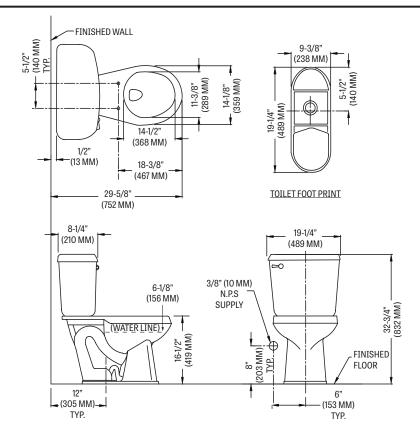

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.

