

**PRO-SPEC™**  
**BUILDER SERIES**  
**BATHWARE**



**MANSFIELD®**

# INSTALLATION INSTRUCTIONS

## PRO-SPEC™ BUILDER SERIES BATHTUBS

 **MANSFIELD®**

3060TFS - 6604 LH/6605 RH

3260TFS - 6649 LH/6650 RH

### BEFORE YOU START:

#### TOOLS NEEDED:

- Level
- Tape Measure
- Pencil
- Power Drill
- Caulk Gun

#### SUPPLIES NEEDED:

- #8 X 1-½" Self-tapping screws
- Silicone/Caulking compound
- 1" x 3" x 60" Ledger Board
- Mortar Compound

**WARNING:** Always use assistance when handling, positioning and/or installing the bathtub. Do not drag or shift the tub on a rough surface.

### ROUGH-IN GUIDE:

Note: Rough-in measurements may vary +/- ¼" from specification sheet.

Models 6604 LH/6605 RH reference Diagram 3 – Framing and Plumbing Rough-in.


Models 6649 LH/6650 RH reference Diagram 4 – Framing and Plumbing Rough-in.

1. When Framing and Plumbing Rough-In is finished verify specifications.
2. Make sure the 3 wall alcove is framed squarely and the floor is level.
3. Carefully place the tub inside the alcove. Using a 3' or 4' level check the tub along the back, front and on both ends. Make sure the front apron is resting firmly on the floor. Shims may be used under the leveling legs if necessary.
4. After tub is leveled mark each stud above the flange along the back wall.
5. Remove tub from alcove and measure the distance between the top of the flange and bottom of the back ledge. Check your measurement in four areas near each corner and approximately 20" from the corner.
6. Using the measurement as a reference, place a mark on each stud 1 ¼" directly below the original marks.
7. Attach a 1" x 3" ledger board or strip below the lower marks. Re-check ledger for level.
8. Install the Waste and Overflow Assembly (Not provided) on the bathtub using the manufacturer's installation instructions.
9. Apply a bed of mortar underneath the bath area that encompasses the leveling support legs.
10. Install the tub and secure the tub to each stud using #8 x 1 x 1-1/2 sheet metal screws.


Note: Pre-drilling the tub flange using a 1/8" drill bit is recommended to prevent potential cracking.

# DIAGRAMS

## Alcove Rough-in

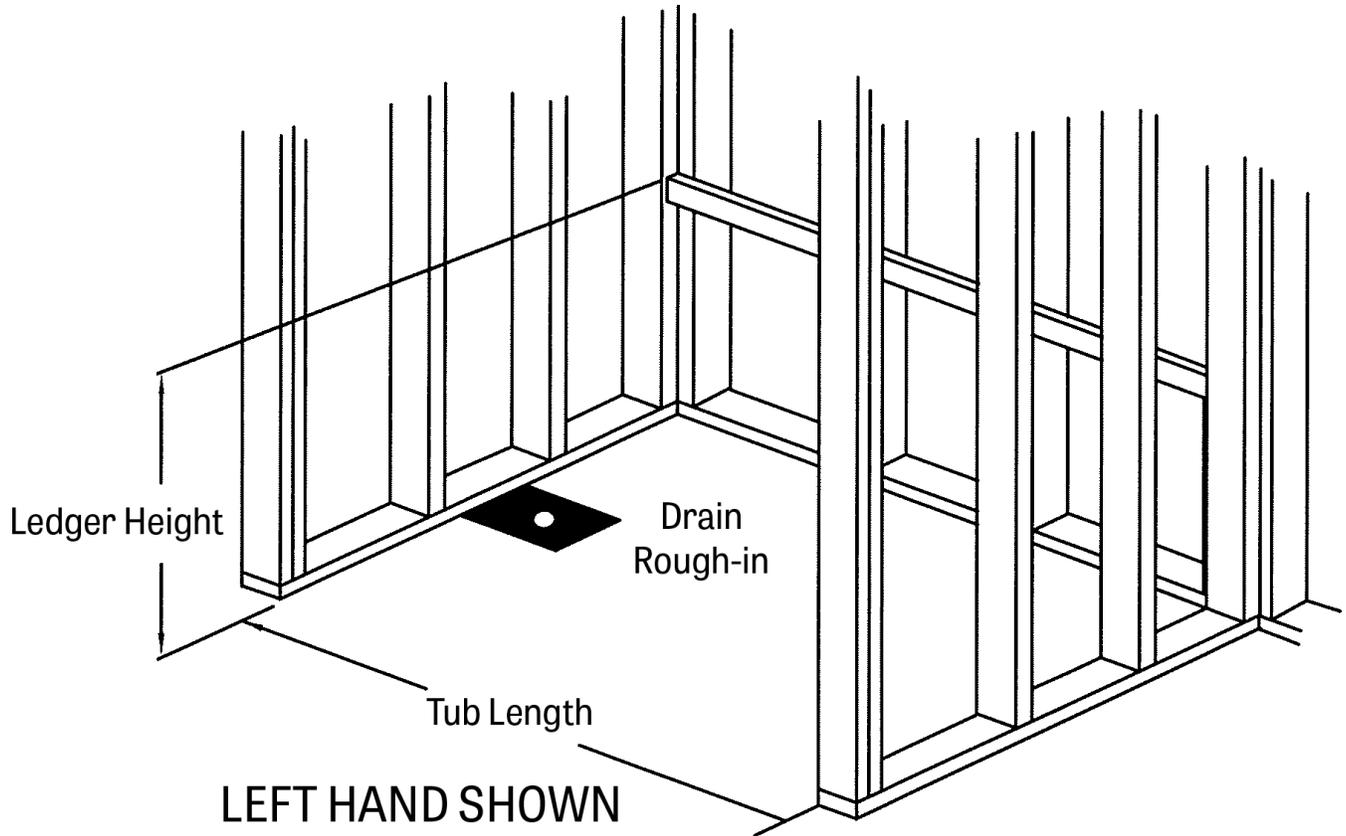


## Plumbing Rough-in

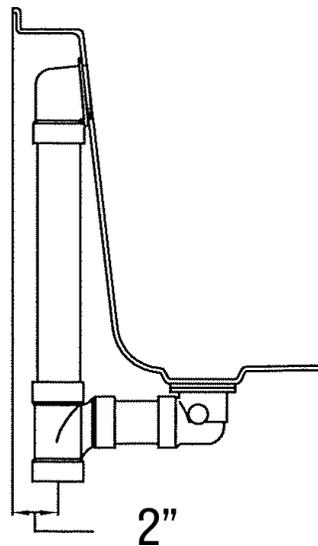


# DIAGRAMS

MODELS: 3060 TFS LH - 6604  
3060TFS RH - 6605

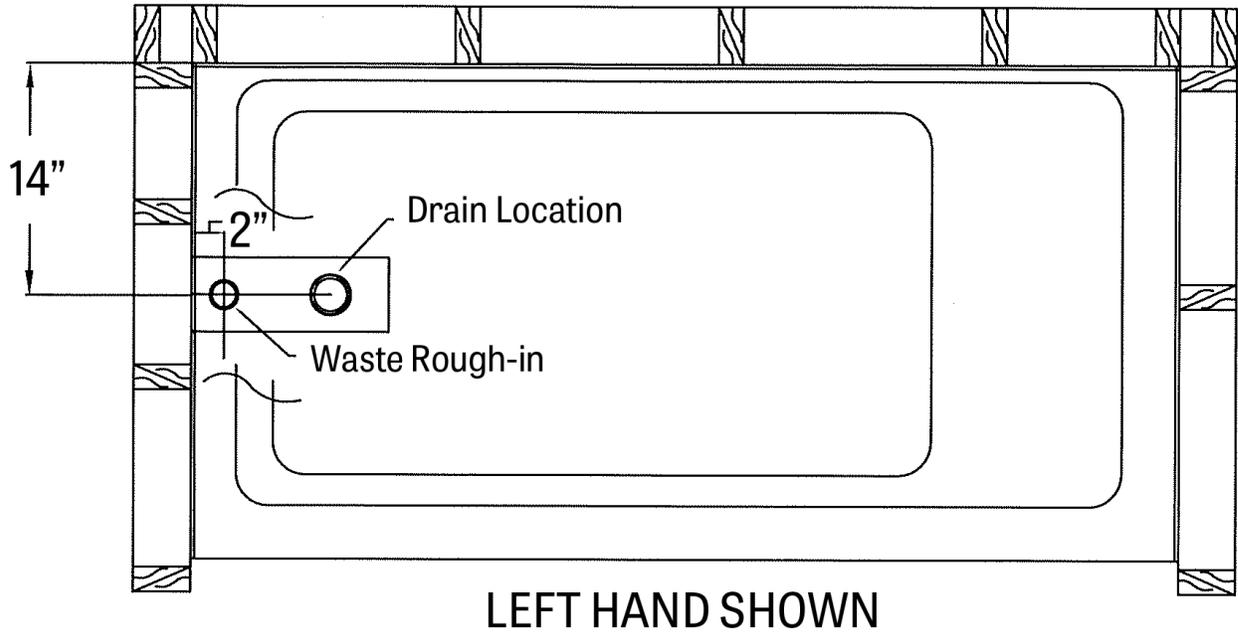

MODELS: 3260 TFS LH - 6649  
3260TFS RH - 6650

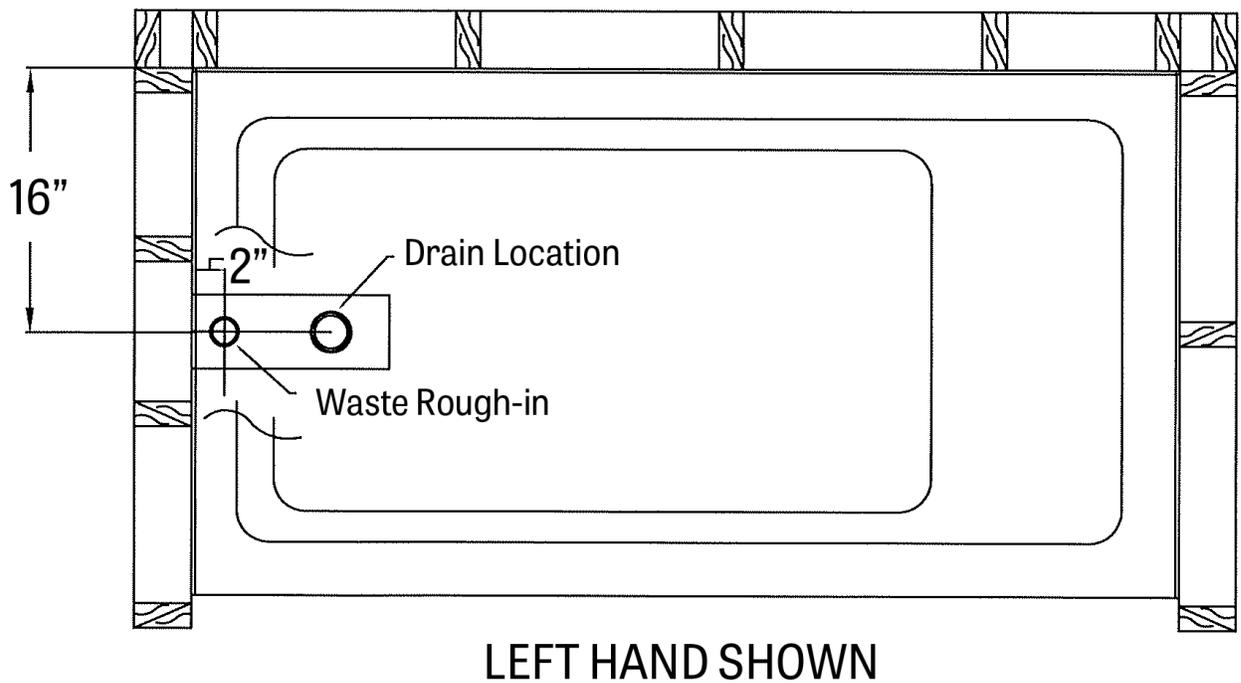



# MAINTENANCE, CLEANING AND REPAIRS

Your Pro-Spec<sup>®</sup> Bathtub is made of acrylic. Acrylic provides a beautiful, high-gloss finish that is extremely durable and is a beautiful look in any bathroom.

**IMPORTANT!** Use the recommended information described in this section. Use of other cleaning materials and/or methods may harm your Bathtub surface and will void your warranty. The Bathtub surface will retain its color and gloss indefinitely with normal use, but some bathroom cleaning agents will cause harm.

## CLEANING

Once a week, wash all exposed surfaces of the bathtub with a mild solution of vinegar and water. Check for stubborn spots. Oily or greasy spots can be lifted with denatured alcohol. Wipe off with clear, warm water and dry with soft cloth.


**WARNING:** Under no circumstances should abrasive tools or abrasive cleaners be used on any part of the bath. Examples include, but are not limited to, wire brushes, metal sponges, knives, steel wool, scouring pads, petroleum based solvents such as paint thinner, acetone or scrubbing cleaners. All of the aforementioned products and the like will damage the finish of the bathtub.

### Surface Repair

If an accident occurs and your Bathtub has a scratch or minor abrasion, it can be repaired by buffing. If the damage is superficial, use a polishing compound used for automobile finishes. If the damage is a little deeper, sanding the spot before applying the polish will normally take care of the problem. The depth of the scratch or abrasion will determine the sandpaper grade to use. A 600 grade paper is required for light to moderate damage and 400 to 220 grade will be needed for deeper damage. When sanding, begin with the lowest number grade of paper and work up to using the auto car polish. With a change of paper, you will need to sand a slightly larger area than the damaged area.

It is not recommended that you repair heavy damages or damage in the bottom of the bath yourself. We will be happy in assisting you in finding a qualified acrylic repair company.

## CODE COMPLIANCE



Accepted by the "Plumbing Research Committee" of the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code. (For Acrylic Bath Shells). Listed 2719

# WARRANTY

Mansfield Plumbing Products, LLC offers the following expressed warranty to the original purchaser of any Pro-Spec Bathtub who purchases the product for personal or single family residential use ("user"). We will repair or replace, at our sole option, the product in accordance with the following terms and conditions.

## ONE (1) YEAR WARRANTY FOR ACRYLIC SHELL

Mansfield Plumbing Products, LLC extends to the user of the product a non-transferable One (1) year warranty from the date the product was originally purchased by the user, but not more than Two (2) years from the date of manufacture that the shell will maintain its structural integrity and be free of water loss due to a defect in the tub shell. This warranty covers only the product shell against defects in material or workmanship.

## WARRANTY LIMITATIONS

In no event shall Mansfield Plumbing Products LLC be liable for incidental or consequential damages, for damages resulting from improper installation or for damages caused by handling, neglect, abuse or alteration. Our warranty does not cover defects or damage caused by the common carrier, installer, user or other persons resulting from, without limitation: careless handling, improper voltage supply/electrical modifications, misuse; incorrect operation; lack of or improper routine maintenance; incorrect or inadequate water use or use of improper cleaners. Chips, cracks and scratches are damages and are not covered under warranty; however, they may be repaired by a qualified technician at the user's expense. Damages or defects that should have been detected before installation are not covered. All implied warranties, including any warranty of fitness for any particular purpose of merchantability, or those that might arise from a course of dealing with the purchaser or usages of trade, are hereby disclaimed or excluded.

Mansfield Plumbing Products is not responsible or liable for any delays or any failure to perform due to unforeseen circumstances or causes beyond Mansfield Plumbing Products' control, when such delays or failure is due, directly or indirectly, to acts of God, war (including civil war), riots, embargoes, acts (whether sovereign or contractual) of civil or military authorities, acts of any government, major change in economic conditions, fires, floods, explosions, the elements, epidemics quarantine restrictions, strikes, lockouts, plant shutdowns, slowdowns, accidents, shortages of raw energy, materials, component parts, labor, or delays of suppliers or subcontractors.

Note: Some states do not allow limitations on an implied warranty, and some states do not allow exclusions or limitations regarding incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific legal rights and you may have other rights which vary from state to state. No person is authorized to change, add to, or create any warranty or obligation other than set forth herein. This is our exclusive warranty.

## RESPONSIBILITIES OF OTHERS

Inspecting the unit prior to installation is the responsibility of the installer or building contractor who acts on behalf of the user. They are responsible for ensuring the unit is free of defect or damage. Notices are placed on and in the unit and on the shipping carton advising the installer of this responsibility. In the event of a problem, the unit must not be installed. The Company is not responsible for failures or damage that could have been discovered, repaired, or avoided by proper inspection and testing (including proper water testing) prior to installation.

Damage occurring in transit is the responsibility of the carrier. The user or installer MUST open the crate and inspect the unit for damage when it is delivered. If damage is discovered, it must be reported immediately to the seller and the carrier in writing, and an inspection requested. Failure of the carrier to respond should be reported to the seller and the carrier. Your freight claims should be filed promptly thereafter.

It is the responsibility of the installer, building contractor, or user to provide access for service. Mansfield Plumbing Products, LLC is not responsible for any costs relating to obtaining access for repair.

## WARRANTY SERVICE

Mansfield Plumbing Products, LLC maintains a list of independent service personnel to perform required warranty service repairs. Such firms are not agents or representatives of Mansfield Plumbing Products, LLC and cannot bind us by words or conduct. We will provide warranty service when Mansfield Plumbing Products, LLC has been notified of the problem during the active warranty period and deemed the problem to be of the nature or type covered by the warranty.

The product serial number, users address and contact information must be provided to obtain warranty service.

## SERIAL NUMBER

---

# PRO-SPEC™ BUILDER SERIES BATHWARE



 **MANSFIELD™**

CUSTOMER SERVICE: (877) 850 3060 or Fax: (419) 938-6234  
[www.mansfieldplumbing.com](http://www.mansfieldplumbing.com)

Form No. 42000002002 02/19  
©2019 Mansfield Plumbing Products, LLC