

# 2916CTK DENALI® 1.28



Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet Kit

## FEATURES

- Complete toilet kit (CTK)
- High performance MagnaFlush™ flushing technology
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- PuraClean® easy-to-clean glaze
- Elongated front, SmartHeight™ bowl
- Pilot anti-siphon fill valve
- 3" rigid flapper flush valve
- 12" rough-in
- SmartFasten™ 2-bolt tank-to-bowl connection
- Model 77 decorative metal trip lever
- 2" glazed trapway
- The Mansfield® limited lifetime warranty on china, Five-year limited warranty on tank trim
- Available in White



<b>MODEL 2916CTK</b>			
Toilet seat included	ELONGATED	SMARTHEIGHT ADA	CTK
Complete toilet kit			

## COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS
2916CTK	Elongated front, SmartHeight™ complete toilet kit. Includes: slow close toilet seat, wax toilet ring, floor bolts, caps, and multi-lingual installation instructions. Water supply hardware not included.	   
4977	Elongated front, SmartHeight™ toilet bowl only. Less toilet seat and supply.	
2916	Tank and cover only, with left hand, side-mount, chrome-plated, metal trip lever. Less supply.	
3800	Elongated, slow close toilet seat	
TANK TRIM & REPLACEMENT PARTS		
77	Trip lever - left hand, side-mount, chrome-plated, metal trip lever	
2206	Pilot operated fill valve	
2916-1112	Denali® 1.28 rigid flapper flush valve	
630-0030	Replacement flush valve seal	
3916-LID	Tank lid	



# 2916CTK DENALI® 1.28



Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet Kit

## SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
2916CTK	Elongated front, SmartHeight™ (1.28 gpf / 4.8 lpf) two-piece toilet kit	   

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	MagnaFlush™ Flushing Technology
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	6-1/2' X 9-3/4'
ROUGH-IN	12'
MAP RATING	1,000 grams

TRAP DIAMETER	2'
TRAP SEAL	2'
SHIPPING WEIGHT	Model 2916CTK- 94 lbs. (43 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited Five-Year

## TECHNICAL INFORMATION

**Note:** these dimensions are nominal and subject to change without notice.

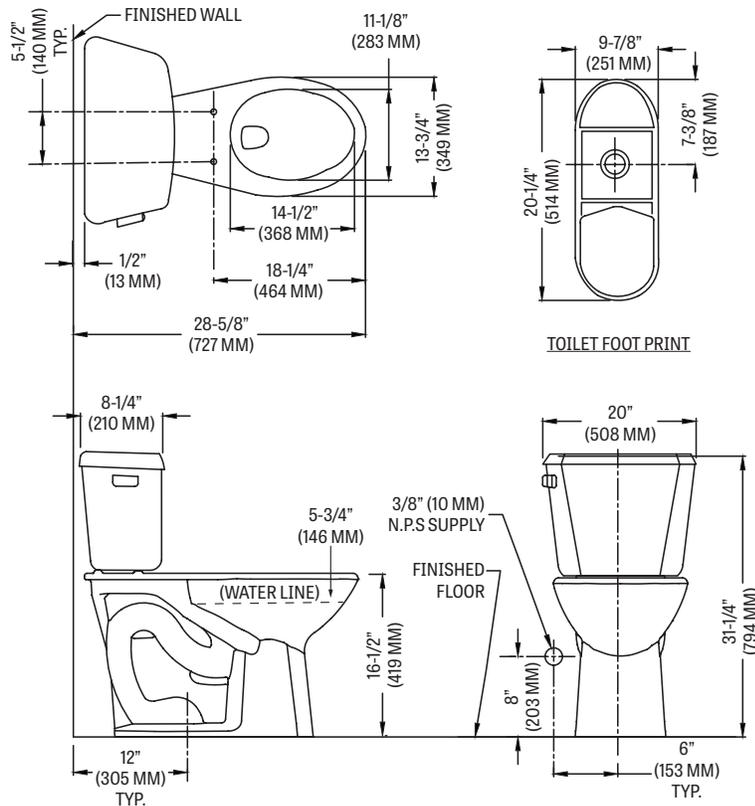

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.

