130LTCTK PRO-FIT®1

MANSFIELD®

Complete Toilet Kit, Round Front, Vitreous China, Two-Piece Toilet

FEATURES

- · Complete toilet kit (CTK)
- · 3-bolt SmartFasten™ tank-to-bowl connection
- 1.6 gpf / 6.0 lpf low water consumption
- · Round front bowl
- 2" flush tower
- · Fluidmaster® anti-siphon pilot fill valve
- 12" rough-in
- · Lined tank for reduced condensation
- · Model 40 chrome-plated, plastic trip lever
- · 2" glazed trapway
- · The Mansfield® limited lifetime warranty
- · Available in White



Toilet seat included	
Complete toilet kit	

COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
130LTCTK	Round front, two-piece toilet kit. Includes: toilet seat, wax toilet ring, floor bolts, caps, and multi-lingual installation instructions. Water supply hardware not included.			
130	Round front, toilet bowl only. Less toilet seat.			
170	Tank and cover only with left hand, front-mount, chrome-plated, plastic trip lever. Fluidmaster® anti-siphon pilot fill valve. Tank liner. Less supply.			
SB100	Round, closed front, plastic toilet seat and cover.			
TANK TRIM & REPLACEMENT PARTS				
40	Trip lever - chrome-plated, plastic trip lever, left hand			
211-1112	Flush tower			
400A	Fluidmaster® anti-siphon pilot fill valve			
630-0030	Replacement flush valve seal			
160-LID	Tank lid			

130LTCTK PRO-FIT® 1

MANSFIELD®

Complete Toilet Kit, Round Front, Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
130LTCTK	Round front (1.6 gpf / 6.0 lpf) two-piece toilet kit.	C ®

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	2" Flush Tower
WATER USAGE	1.6 gpf / 6.0 lpf
WATER SURFACE AREA	8" X 9"
ROUGH-IN	12"
MAP RATING	800 grams

TRAP DIAMETER	2"
TRAP SEAL	2-5/8"
SHIPPING WEIGHT	Model 130LTCTK - 85 lbs. (38.2 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

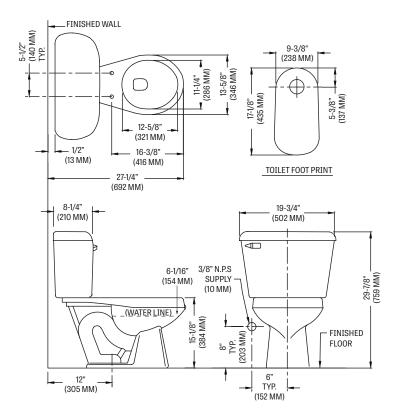

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.