## 385-377RH **SUMMIT® PRO 1.28**

### **MANSFIELD®**

Elongated Front, SmartHeight™, Vitreous China, 10" Rough-In, Two-Piece Toilet

### **FEATURES**

- High performance MagnaFlush™ flushing technology
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- Elongated front, SmartHeight<sup>™</sup> bowl (ADA compliant)
- SmartFasten™ 3-bolt tank-to-bowl connection
- 3" Rigid Flapper flush valve requires less force to flush, is more consistent and uses a simple universal repair part/seal
- · Fluidmaster® pilot operated anti-siphon fill valve
- 10" rough-in
- · Model 59RH color match, metal trip lever
- · 2" glazed trapway
- The Mansfield® limited lifetime warranty on china, Five-year limited warranty on tank trim
- · Available in White



#### COMPONENTS

| MODEL #                       | DESCRIPTION  | CODES/STANDARDS                      |  |  |
|-------------------------------|--|--------------------------------------|--|--|
| 385-377RH                     | Elongated front, SmartHeight™, two-piece toilet. Less toilet seat and supply.                  | P SEPSEN                             |  |  |
| 385                           | Elongated front, SmartHeight™ toilet bowl only. Less supply.                                   |                                      |  |  |
| 377RH                         | Tank and cover only, with right hand, front-mount, color match, metal trip lever. Less supply. | ADA COMPLIANT HIGH EFFICIENCY TOLLET |  |  |
| TANK TRIM & REPLACEMENT PARTS |  |                                      |  |  |
| 59RH                          | Trip lever - color match, metal trip lever, right hand   |                                      |  |  |
| 2036-1212                     | Summit® 1.28 rigid flapper flush valve   |                                      |  |  |
| 400A                          | Fluidmaster® anti-siphon pilot fill valve  |                                      |  |  |
| 2206                          | Anti-siphon pilot fill valve (compatible replacement)  |                                      |  |  |
| 630-0030                      | Replacement flush valve seal   |                                      |  |  |
| 386-LID                       | Tank lid   |                                      |  |  |

# 385-377RH **SUMMIT® PRO 1.28**

## **MANSFIELD®**

Elongated Front, SmartHeight™, Vitreous China, 10" Rough-In, Two-Piece Toilet

### **SPECIFICATIONS**

| MODEL #   | DESCRIPTION   | CODES/STANDARDS  |
|-----------|---|--|
| 385-377RH | Elongated front, SmartHeight™ (1.28 gpf/4.8 lpf) two-piece toilet | ADA COMPLIANT  ADA CO |


| MATERIAL             | Vitreous China                  |
|----------------------|---------------------------------|
| WATER PRESSURE RANGE | 20 to 80 PSI                    |
| FLUSH SYSTEM         | MagnaFlush™ flushing technology |
| WATER USAGE          | 1.28 gpf / 4.8 lpf              |
| WATER SURFACE AREA   | 9" X 10"                        |
| ROUGH-IN             | 10"                             |
| MAP RATING           | 1,000 grams                     |

| TRAP DIAMETER   | 2"   |
|-----------------|--|
| TRAP SEAL       | 2-3/8"   |
| SHIPPING WEIGHT | Model 385 - 54 lbs. (24.4 kg)<br>Model 377RH - 36 lbs. (16.3 kg)   |
| WARRANTY        | Vitreous China - Limited Lifetime<br>Tank Trim - Limited Five Year |

## TANK OPTIONS Variation of model 377RH, with left hand trip lever.

### TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

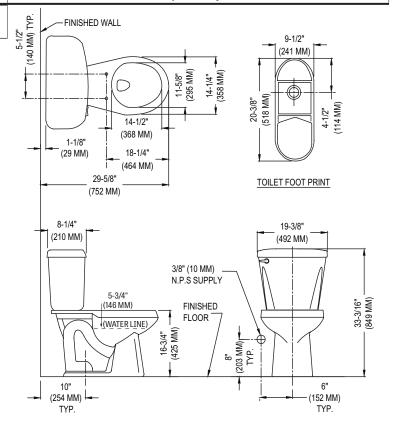

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.