### MANSFIELD LOWE'S



**VANQUISH®** 

Elongated Front, SmartHeight™, Vitreous China, Two-Piece Toilet, Complete Toilet Kit

### **FEATURES**

- · Complete toilet kit (CTK)
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- · Revolutionary seat design with side-mount hinges for easy cleaning
- · PuraClean® easy-to-clean glazed surface
- · Elongated front, SmartHeight™ bowl
- · 3' Rigid Flapper flush valve requires less force to flush, is more consistent and uses a simple universal repair part/seal
- · Fluidmaster® Pilot anti-siphon fill valve
- 12' rough-in
- SmartFasten<sup>™</sup> 2-bolt tank-to-bowl connection
- · Model 39 decorative metal trip lever
- · 2' glazed trapway
- · The Mansfield® limited lifetime warranty on china, Five-year limited warranty on tank trim & seat
- · Available in White



MODEL 5988CTK		
Toilet seat included		

Complete Toilet Kit







#### COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS				
5988CTK	Elongated front, SmartHeight <sup>™</sup> complete toilet kit. Includes slow close toilet seat, tank and bowl, flange bolts, wax ring with polyethylene flange and instructions. Less supply.	terse.				
4987	Elongated front, SmartHeight™ bowl with side-mount seat.	HIGH EFFICIENCY TOULET  ADA COMPLIANT				
2987	Tank and lid only. With left hand, chrome-plated metal trip lever. Less supply.					
SB4000	Patented slow close seat with side-mount hinges*					
TANK TRIM & REPLACEMENT PARTS						
39	Trip Lever - chrome-plated metal trip lever, left hand					
400A	Fluidmaster® Pilot anti-siphon fill valve					
2206	Pilot operated fill valve					
2987-1112	3' Rigid Flapper flush valve					
630-0030	Replacement flush valve seal					
3987-LID	Tank lid					



# MANSFIELD LOWE'S



## **VANQUISH®**

Elongated Front, SmartHeight™, Vitreous China, Two-Piece Toilet, Complete Toilet Kit

### **SPECIFICATIONS**


MODEL #	DESCRIPTION	CODES/STANDARDS
5988CTK	Elongated front, SmartHeight™ (1.28 gpf/4.8 lpf) two-piece toilet kit	HIGH EFFICIENCY TOLLET  ADA COMPLIANT

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3' MagnaFlush™ Flushing Technology
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	8' X 7'
ROUGH-IN	12'
MAP RATING	1,000 grams

TRAP DIAMETER	2'
TRAP SEAL	2-3/8'
SHIPPING WEIGHT	Model 5988CTK - 98 lbs. (44 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim & Seat - Limited Five-Year

### TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

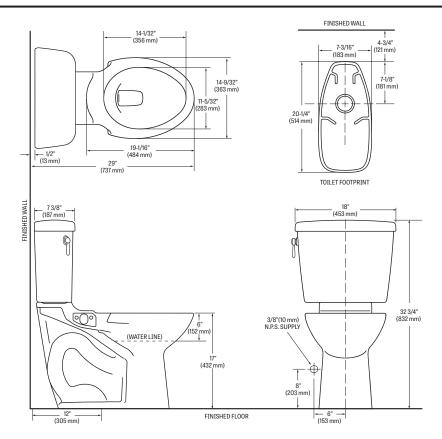

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes. Exclusively available at Lowe's

